


# XTLPLUS

## USER GUIDE

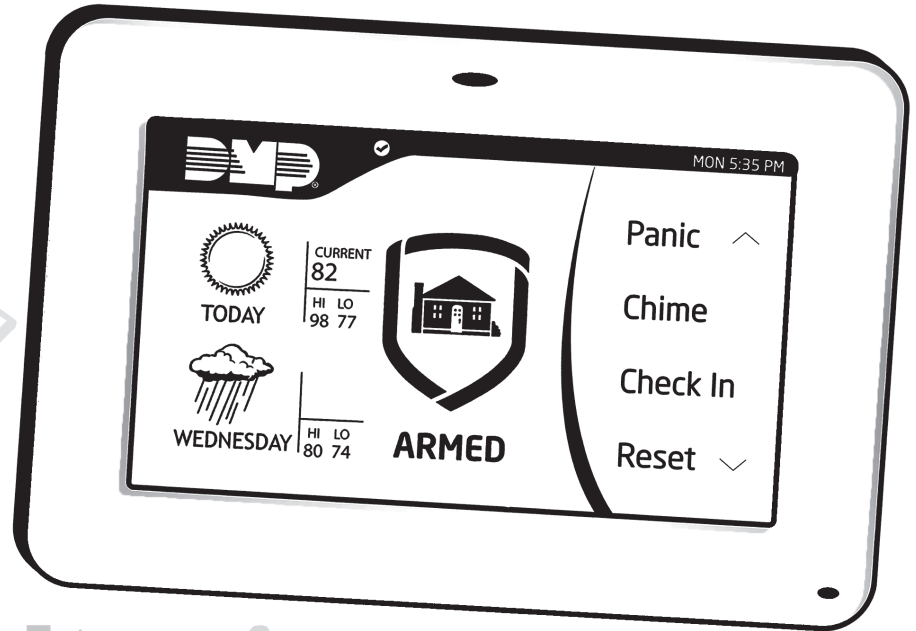

## Silencing an Alarm

When the alarm siren is sounding, enter your user code or present your card to a keypad or reader during the Status List display.

IS THIS A FALSE ALARM? YES NO or CANCEL VERIFY displays.

- If a burglar alarm is valid, press NO or VERIFY to send a verification message to the Central Station. The system will remain armed.
- If a valid alarm has not occurred, press YES or CANCEL to cancel the alarm and send an Abort or Cancel message to the Central Station and the security system will be disarmed.

**Note:** For **Area Systems**, this prompt is displayed only if the User Code has the authority to disarm the area.

### **What to do when a trouble tone is sounding**

You can silence the trouble tone by pressing any key. This only silences the keypad and does not correct the condition that originally caused the problem.

© 2017 Digital Monitoring Products, Inc.

Information furnished by DMP is believed to be accurate and reliable.  
This information is subject to change without notice.

# XTLplus User Guide

## Table of Contents

| <i>Section</i>                            | <i>Page</i> | <i>Section</i>                        | <i>Page</i> |
|---|-------------|---------------------------------------|-------------|
| <b>Introduction</b> .....                 | <b>1</b>    | <b>User Menu</b> .....                | <b>20</b>   |
| XTLplus Systems .....                     | 1           | Accessing the User Menu .....         | 20          |
| About Your Security System .....          | 1           | User Menu Options .....               | 20          |
| Emergency Evacuation Plans .....          | 2           | User Check-in .....                   | 21          |
| Keypads .....                             | 3           | Zone Activity Check .....             | 21          |
| The Select Keys or Areas .....            | 3           | Sensor Reset .....                    | 22          |
| Power/Armed Logo .....                    | 4           | Outputs On Off .....                  | 22          |
| Panic Functions .....                     | 4           | Favorite .....                        | 22          |
| Keypad Common Keys .....                  | 5           | Z-Wave Setup .....                    | 23          |
| Entering Alpha Characters .....           | 5           | Bypass Zones .....                    | 29          |
| Entering Non-Alpha Characters .....       | 5           | Zone Monitor (Chime) .....            | 30          |
| Keypad User Options .....                 | 5           | Using the Zone Monitor Function ..... | 31          |
| Special Keypad Tones .....                | 6           | System Test .....                     | 31          |
| Special Wireless Displays .....           | 7           | User Codes .....                      | 32          |
| Special Keypad Displays .....             | 7           | Schedules .....                       | 34          |
| MyAccess™ Text Messaging Commands .....   | 8           | Extending Schedules .....             | 35          |
| Understanding Security System Terms ..... | 8           | Favorite Schedules .....              | 35          |
| <b>Arming and Disarming</b> .....         | <b>11</b>   | Output Schedules .....                | 36          |
| How Your System Operates .....            | 11          | Time and Date .....                   | 37          |
| Arming Functions .....                    | 11          | Display Events .....                  | 38          |
| Key Fob Arming .....                      | 12          | Request Service? .....                | 38          |
| Key Fob Disarming .....                   | 12          | <b>System Setup</b> .....             | <b>39</b>   |
| Area System Arming .....                  | 12          | System Setup Record .....             | 39          |
| Area System Disarming .....               | 13          | Protection Areas .....                | 39          |
| All/Perimeter System Arming .....         | 14          | Output Record .....                   | 39          |
| All/Perimeter System Disarming .....      | 15          | Z-Wave Device Name .....              | 40          |
| Home/Away System Arming .....             | 16          | Favorite List .....                   | 41          |
| Home/Away System Disarming .....          | 17          | Key Fob Button Programming .....      | 42          |
| Keypad Shortcut Keys .....                | 18          | User Codes .....                      | 42          |

|   |           |
|---|-----------|
| <b>Appendix A</b> .....                   | <b>44</b> |
| About the Display Events Section.....     | 44        |
| Zone Activity Check Event Display .....   | 44        |
| Zone Bypass Event Displays .....          | 44        |
| Zone Event Displays .....                 | 45        |
| Arming and Disarming Event Displays ..... | 45        |
| User Check-in Event Displays .....        | 45        |
| User Code Change Event Displays .....     | 45        |
| Supervisory Event Displays .....          | 46        |
| System Monitor Event Displays.....        | 46        |
| Wireless Jamming Event Displays .....     | 46        |
| <b>Appendix B</b> .....                   | <b>47</b> |
| 1100 Series Wireless Description .....    | 47        |
| <b>Appendix C</b> .....                   | <b>48</b> |
| User's Guide .....                        | 48        |
| Entering User Names.....                  | 50        |
| <b>Appendix D</b> .....                   | <b>51</b> |
| Cell Phone Message User's Guide.....      | 51        |
| MyAccess™ Text Messaging Commands .....   | 51        |
| Subscribe to Text Messages .....          | 54        |
| Common Keypad Displays.....               | 55        |
| <b>Quick Reference Wallet Cards</b> ..... | <b>59</b> |

# Introduction

## XTLplus Systems

This Guide covers operation of the XTLplus systems.

### About Your Security System

Your system is designed with your safety and comfort in mind. It uses the latest in computer technology to create the most advanced, user friendly, wireless security and fire system available.

The system combines ease of use with a simple to understand keypad display to offer the full range of features requested by today's security system owners. Your security system can protect both the interior and perimeter of your home or business while you are away or just the perimeter when you are inside, giving you a wall of security and peace of mind.

You can turn portions of your protection on or off at any time by pressing a few keys. You can add, delete, and change personal user codes at any time or check the status of all protection devices in the system.

### Keypads

This is the device we have placed at certain locations throughout the premises that allows you to turn the system protection on and off using your personal user code.

### Keypad User Menu

The keypad provides a simple User Menu containing all of the functions you need to fully operate your system such as performing a system test or changing a personal user code.

### A Note About False Alarms

One of the most important concerns facing the security industry today is false alarms. The accidental dispatching of police and fire agencies places others in jeopardy by limiting the response capability of those emergency service units.

As part of our commitment to reducing false alarms, we would like to encourage you to read this guide thoroughly. All the information contained here can help you quickly, and comfortably, learn the XTLplus Series system operation.

**Note:** There may be a 30-second alarm communication delay pre-programmed at installation to allow disarming if a false alarm occurs. This delay is optional and can be removed or increased to 45 seconds by your alarm dealer.

### Test Your System Weekly

It is recommended that you test the burglary portion of your system at least once each week. Testing should involve an active test of all doors, windows, and motion detectors connected to your system. If your system also has fire protection, call the service department to find out how this portion of your system should be tested.

Refer to the System Test section of this guide for instructions on testing the burglary portion of your system.

## Emergency Evacuation Plans

### Overview

The National Fire Protection Association recommends that you establish an emergency evacuation plan to safeguard lives in the event of a fire or other emergency.

### Draw a floor plan of your home or business

On a clean sheet of paper, draw the walls, windows, doors, and stairs. Also draw any obstacles that a person may encounter while exiting the building such as large furniture or appliances.

### Develop escape routes


Determine at least two routes the occupants in each room can take to safely escape. One route can be the most obvious such as the door. Another can be through an easily opened window. If the window is high off the ground, an escape ladder should be provided. Draw arrows on the floor plan to show escape routes from each room.

### Decide where to meet

Prearrange a meeting place outside and away from where emergency personnel are likely to be working. A neighbor's house or across the street in front of the house are good locations. Always perform a head count to make sure all occupants safely exited. NEVER ENTER A BURNING BUILDING. If the head count shows one or more persons missing, give this information immediately to the authorities. Never enter a building to look for someone.

## Practice your escape plans

Devising an escape plan is only the beginning. For the plan to be effective everyone should practice escape routes from each room.

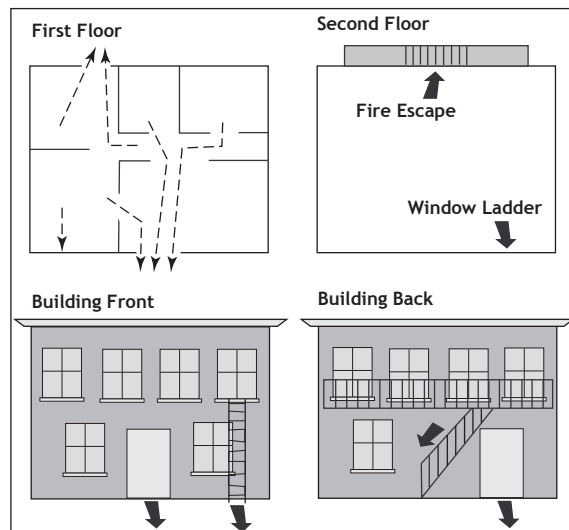


Sample Escape Route Map

### Early detection


The best way to survive a fire or other emergency is to get out early. A fire alarm system installation, with smoke and carbon monoxide detectors in each room, can greatly decrease your risk of loss or injury.

## Keypads

Your system has an easy to use keypad that allows you to properly operate the system.

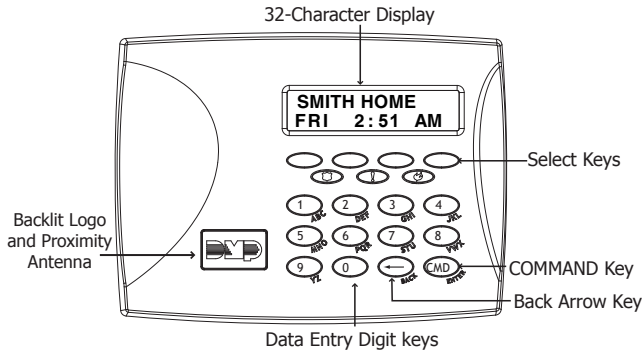

**DMP 9000 Series Wireless Keypad**

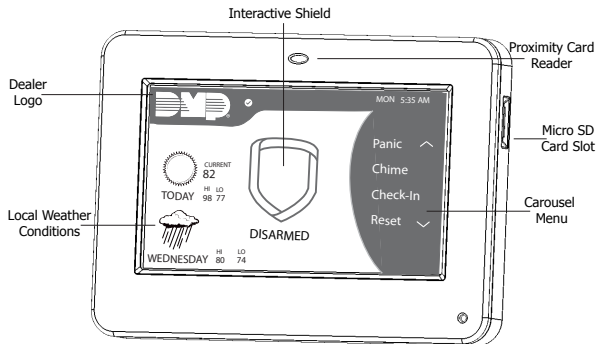

**9800 Series Graphic Touchscreen Keypad**

## The Select Keys or Areas


### 9000 Series Wireless Keypads:

There are four keys under the display called the select keys. These keys are one of the features that make your system so easy to operate. They allow you to make selections by pressing the select key under a choice shown in the display.

**Note:** For the purposes of this guide, when instructed to press the first select key, press the far left select key; the second select key is the second from the left; third select key is second from the right; and the fourth select key is the far right key.

### 9862 Graphic Touchscreen Keypads:

There are four select areas in the display. These select areas are one of the features that make your system so easy to operate. They allow you to make selections by touching the area to choose the item in the display. See Graphic Touchscreen Keypad User

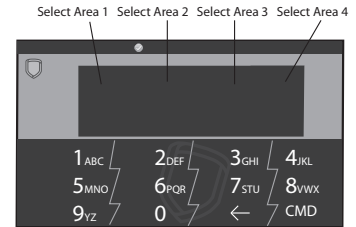

Guide (LT-1191) for complete features and operation of the 9862 Graphic Touchscreen Keypad.

### Graphic Touchscreen Select Areas

**Note:** For the purposes of this guide when using Graphic Touchscreen Keypads, when instructed to press the first select key, touch select area 1; the second select key touch select area 2; third select key touch select area 3; and the fourth select key touch select area 4.

## Power/Armed Logo

### 9000 Series Wireless Keypads:

The backlit logo on the keypad indicates the panel armed status and the keypad power status. Depending on the operation, the logo displays Red or Green as listed in the table.

| Color and Activity  | Armed Status   | Keypad Power Status        |
|---------------------|----------------|----------------------------|
| Green Steady        | Panel Disarmed | AC Power OK, Battery OK    |
| Green Blinking      | Panel Disarmed | AC Power OK, Battery Fault |
| No Light            | Panel Disarmed | AC Power Fault, Battery OK |
| Red Steady          | Panel Armed    | AC Power OK, Battery OK    |
| Red/Green Alternate | Panel Armed    | AC Power OK, Battery Fault |
| Red Blinking        | Panel Armed    | AC Power Fault, Battery OK |

The Armed LED is ON steady anytime any burglary protection area is armed and is OFF when ALL areas are disarmed.

### 9862 Graphic Touchscreen Keypads:

The LED indicates the Power and Armed status of the panel. Depending on the operation, the LED displays in Red or Blue as listed in the table. See Graphic Touchscreen Keypad User Guide (LT-1191) for complete features and operation of the 9862 Graphic Touchscreen Keypad.

| Color and Activity | LED Operation                              |
|--------------------|--|
| Blue Steady        | Panel Disarmed, AC Power OK, Battery OK    |
| Blue Blinking      | Panel Disarmed, AC Power OK, Battery Fault |
| No Light           | Panel Disarmed, AC Power Fault, Battery OK |
| Red Steady         | Panel Armed, AC Power OK, Battery OK       |
| Red/Blue Alternate | Panel Armed, AC Power OK, Battery Fault    |
| Red Blinking       | Panel Armed, AC Power Fault, Battery OK    |


## Panic Functions

Your keypad may be set up to send a Panic, Emergency, or Fire report to the central station. This function is optional. If this option is programmed for your keypad, icons display below the top row select keys or areas.

### 9000 Series Wireless Keypads:

Press and hold the two select keys or areas adjacent to the desired icon for 2 seconds, until a beep from the keypad is heard.

#### Wireless Keypad Panic Keys

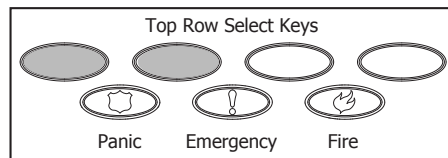

#### With Shaded Buttons To Indicate Police Panic Keys

### 9862 Graphic Touchscreen Keypads:

Touch the icon for 2 seconds until a beep is heard. See Graphic Touchscreen Keypad User Guide (LT-1191) for complete features and operation of the 9862 Graphic Touchscreen Keypad.



#### Graphic Touchscreen Panic Icons



## Keypad Common Keys

### Data Entry Digit keys

These keys allow you to enter your user code when arming or disarming or enter other information into the system. For additional information on entering user names into the system see Entering Non-Alpha Characters below or Entering User Names in Appendix C.

### CMD (Command) key

The CMD key allows you to advance through the keypad displays, User Menu, or complete a data entry function.

### Back Arrow (←) key

The Back Arrow (←) key is used to go back through the keypad displays while operating your system. You can press the Back Arrow key to back up through the list of functions in the User Menu or to erase the last character you entered.

### Entering Alpha Characters

Some options during programming require you to enter alpha characters. To enter an alpha character, press or touch the key that has that letter written below it. The keypad displays the number digit of the key. Next, press the select key or area that corresponds to the location of the letter under the key. Pressing a different Select key/area changes the letter. When another digit key is pressed, the last letter displayed is retained and the process starts over.

### Entering Non-Alpha Characters

To enter a space in an alpha entry, press the 9 digit key followed by the third select key or area. The three characters on the 9 digit key are Y, Z, and space. You can also enter the following characters: - (dash), . (period), \* (asterisk), and # (pound sign) using the 0 (zero) key and the four Select key or areas from left to right. For example, to enter a - (dash), press the 0 (zero) key and then the left Select key or area. A dash now appears in the keypad display. The table below shows the character locations for DMP keypads.

*Introduction*

| Key Number | Select Key 1 | Select Key 2 | Select Key 3 | Select Key 4 |
|------------|--------------|--------------|--------------|--------------|
| 1          | A            | B            | C            | (            |
| 2          | D            | E            | F            | )            |
| 3          | G            | H            | I            | !            |
| 4          | J            | K            | L            | ?            |
| 5          | M            | N            | O            | /            |
| 6          | P            | Q            | R            | &            |
| 7          | S            | T            | U            | @            |
| 8          | V            | W            | X            | ,            |
| 9          | Y            | Z            | space        | _            |
| 0          | -            | .            | *            | #            |

### Keypad User Options

The User Options menu allows you to make adjustments to your keypad to best fit your environment and needs.

#### 9000 Series Wireless Keypads:

Press and hold the Back Arrow and CMD keys for two seconds. The keypad display changes to SET BRIGHTNESS. Press the CMD key to display the next option or the Back Arrow key to exit.

#### Backlighting Brightness

At the SET BRIGHTNESS display, use the left select key or area to lower the keypad brightness. Use the right select key or area to increase the brightness.

**Note:** If the brightness level is lowered, it temporarily reverts back to maximum intensity whenever a key is pressed.

#### Internal Speaker Tone

Set the tone of the keypad internal speaker. At the SET TONE display, use the top left select key or area to make the tone lower. Use the right select key or area to make the tone higher.

## Volume level

Set the volume level of the keypad internal speaker for key presses. During alarm, trouble, and prewarn conditions, the volume is always at maximum level. At SET VOLUME LEVEL, use the left select key or area to lower the keypad volume. Use the right select key or area to raise the volume.

## Serial Number

The serial number assigned to the keypad displays. Press the Back Arrow key to exit the User Options function.

## 9862 Graphic Touchscreen Keypads:

Press Options on the Carousel Menu until it glows. The keypad displays the Setting Options screen. Adjust the Screen Brightness, Tone, and Volume by pressing the arrows at either end of the bar indicators. Pressing the Installer Options Icon displays the Keypad screen. Enter 3577 (INST) on the keypad to access the Installer Options Menu. See Graphic Touchscreen Keypad User Guide (LT-1191) for complete features and operation of the 9862 Graphic Touchscreen Keypad.

## Special Keypad Tones

Your keypad also contains a speaker that alerts you about events as they occur on your system. For burglary alarms, the tone will silence as soon as the first user code digit key is pressed. If a valid user code is not entered within 5 seconds or an invalid user code is entered, the burglary tone begins sounding again.

Below are brief descriptions of the different tones you hear from the keypad.

**Fire alert:** An intermittent sweeping siren that continuously repeats until the fire alarm is silenced. This is in addition to a separate siren activated by the alarm panel.

**Burglary alert:** A siren tone that continues until the alarm is silenced. This is in addition to the separate siren output operated by the alarm panel.

**Key press tone:** A short beep as you press a key on the keypad.

**Prewarn tone:** A continuous pulsed tone that sounds when you open an entry delay door on a system that is armed (turned on) reminding you to disarm the burglary protection.

Your system will silence the tone as soon as the first user code digit key is pressed. If a valid user code is not entered within 5 seconds or an invalid user code is entered, the prewarn tone begins sounding again.

**Exit tone:** When fully arming your system to leave, a continuous pulsing tone sounds during the exit countdown just after arming to remind you to exit the premise. At ten seconds prior to the end of the countdown, the rate of pulsing increases.

**Monitor tone:** A pulsed tone that sounds one time for one second each time a door or window is opened while you are using the zone monitor function from the User Menu. See Zone Monitor.

**Trouble tone:** A steady tone indicating a trouble condition on your system. Press any key to silence the trouble tone.

### What to do when the trouble tone sounds

You can silence the trouble tone by pressing any key. This only silences the keypad and does not correct the condition that originally caused the trouble.

## 1144 Series Wireless Key Fobs

Your system may include wireless key fob(s). This accessory allows controlling the system for such functions as arming, disarming or access control via the access control credential. The available types of DMP wireless key fobs are:


- 4-Button Model 1144-4 Key Fob
- 2-Button Model 1144-2 Key Fob, 1144-2-P Key Fob with Prox
- 2-Button Panic Model 1144-D Key Fob
- 1-Button Model 1144-1 Key Fob, 1144-1-P Key Fob with Prox

The drawing shows the button layout for all models for your reference. Each button on the key fob is programmed to perform a specific action. The button names are listed for your reference.

TOP = the Key Fob Top button  
 BTM = the Key Fob Bottom button  
 LFT = the Key Fob Left button  
 RGT = the Key Fob Right button

The button programming list for the key fob(s) connected to your system is located in the System Setup section of this guide. Refer to Appendix B for LED Status operation information. Specific function labels can be added to each button to indicate button operation.

For best operation, allow the LED to turn on and then turn off before pressing another button. The key fob may not complete sending the signal for the button press if another button is pressed too quickly. See 1144 Series Key Fob Transmitters Installation Guide (LT-1449) for more information.

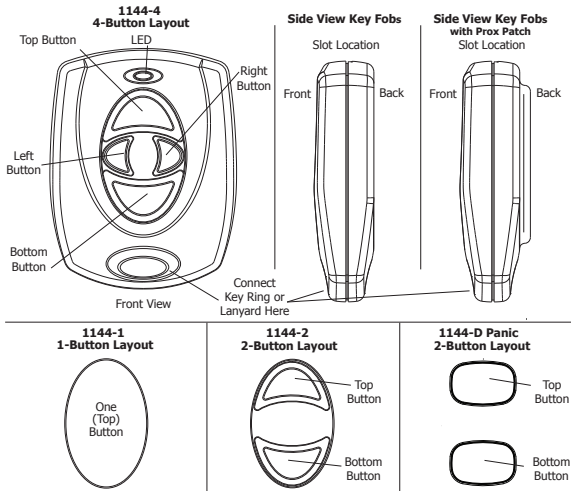

Key Fob Examples and Button Names

## Special Wireless Displays

Your system uses wireless transmitters to send alarm and trouble information from the protection devices to the panel. Wireless systems have several unique keypad displays.

**BACK DOOR -LOBAT** - (Low Battery) The battery in a wireless transmitter is low. (BACK DOOR is used as an example only.)

**BACK DOOR -MISNG** - (Missing) The panel is not receiving the wireless transmitter periodic test report.

**WIRELESS -TRBL** - (Trouble) Some part of your wireless system is operating improperly. Call the service department for assistance.

**WIRELESS RECEIVER JAMMED -ALARM** - Your system may be programmed for wireless interference detection and, if displayed, your wireless receiver has detected an interfering signal while the system is armed.

**WIRELESS RECEIVER JAMMED -TRBL** - (Trouble) Your system may be programmed for wireless interference detection and, if displayed, your wireless receiver has detected an interfering signal while the system is disarmed.

## Special Keypad Displays

As you use your system, you may occasionally see a keypad display that asks you to enter a user code or describes a condition on the system. Below are some examples of the displays you may see.

### ALARM

A 24-hour zone, such as a fire or panic zone, or an armed burglary zone is faulted. Your system may also sound wireless sirens.

### ALARM NOT SENT

The alarm signal was aborted and was not sent to the central station because a user code was entered to disarm the system before the alarm signal was sent to the central station. Also, your system may be pre-programmed at installation to send an Abort signal to the Central Station. Refer to the Introduction section.

## **ALARM CANCELLED**

An Alarm signal just sent to the central station was cancelled because a user code was entered after the alarm was sent. Also, an Alarm Cancel signal is sent to the Central Station.

## **ALARM VERIFIED**

A valid burglar alarm has occurred and has been manually verified by the user. The alarm system also transmits a VERIFY message to the Central Station.

## **ENTER CODE**

The system requires you to enter a personal user code. User codes can be used for turning your system on (arming), turning your system off (disarming), and other system options.

As you enter your user code, the keypad display shows an asterisk (\*) in place of each digit pressed. This prevents others from seeing your user code on the display as you enter it.

## **INVALID CODE or TRY AGAIN**

The user code you entered is not recognized by the system. Check the user code and try again.

## **TRBL (TROUBLE)**

There is a problem with a protection device or system component. This display is accompanied by a description of the problem.

## **SYSTEM TROUBLE or SERVICE REQUIRED**

There is an electronic failure in your system. Contact the service department as soon as possible.

## **TEST IN PROGRESS**

The system is currently being tested by an installation or service technician.

## **MyAccess™ Text Messaging Commands**

Your system may be programmed to allow simple text messages to be sent to the security system and perform basic user operations. By texting a message from your cell phone, the following actions can be performed: Arm/Disarm, check Armed Status, Cancel Alarm, and turn Outputs On/Off. Other operations that may be programmed from your cell phone or PDA include: Turning on and off lights, locking and unlocking doors, and setting the thermostat. See Appendix D for more information.

## **Understanding Security System Terms**

Throughout this guide, and in some displays on your keypad, you may see certain words or phrases that might be unfamiliar.

Below are some terms you will see here and on the keypad display.

### **Arming**

This is the term used for turning on the burglary protection in one or more areas of the system. Your system may require you to enter a user code. When armed, the system can sound alarm sirens and, if monitored, send alarm reports to a central station when a burglary zone is faulted.

Fire, panic, and other 24-hour devices are always turned on and do not need to be armed.

### **Disarming**

This means turning off one or more areas of the system. When disarmed, the system does NOT sound alarms or send alarm reports to a central station when a burglary zone faults.

### **Zone**

A zone refers to a protected opening or protection device assigned to a zone number. Each door or window, motion detector, smoke detector, or other device has a zone number and a name.

## Entry or Exit Zone

Almost all systems have one or more doors through which you can enter or exit the premises. These doors are programmed with a delay time to allow you to enter or exit while the system is armed without setting off the alarm.

When you arm the system, activity on all burglary zones is ignored until the programmed exit delay time expires. Once that time has expired and the system is fully armed, opening the door causes the panel to start the entry delay time. During the entry delay time, enter a valid user code to disarm the system or an alarm occurs.

## Instant Zone

Exterior windows and non-entry doors, or interior protection devices, are typically not programmed with delay times. If these zones fault while the system is armed, an alarm occurs instantly.

## 24-Hour Zone

A 24-hour zone is not turned on or off by arming or disarming your system. Some examples of 24-hour zones are fire zones, panic zones, and temperature control zones.

## Areas

An area is made up of burglary zones that can be armed or disarmed together. The Perimeter area, for example, consists of all the doors and windows on the outside of the building. When you arm the Perimeter, these zones sound an alarm if tripped.

## Central Station Monitoring

Your system can also be programmed to automatically send alarm, trouble, and arming and disarming reports to a central station. Operators at the central station can then dispatch the appropriate authorities or contact you with the specific event information.

## Status

Status is a feature that automatically displays the system armed or disarmed status at the keypad and on the panel enclosure. Alarm or trouble conditions on a zone or a system monitor such as AC or battery trouble can also display. There are two types of status information available: **Status List** and **Armed Status**.

### Status List

The Status List displays any alarm or trouble condition on a zone and any trouble condition that occurs with the AC power or battery power. If your system contains any Panic zones, these do not display on the keypad for security reasons.

If an alarm occurs on a non-fire, 24-hour zone or a system monitor, it remains in the Status List until it restores. If one or more armed burglary zones trips, the last one to trip remains in the Status List. The burglary zone alarm remains in the Status List until it is cleared by disarming the system. Pressing the CMD key allows the next status list item to be displayed.

### Zone Status

To display the status of a particular zone, enter the zone number followed by the CMD key when the keypad displays the Status List.

### Armed Status

With Armed Status, the keypad displays the current armed condition of areas within your security system.

The keypad displays

When

HOME SYSTEM ON

The perimeter areas is armed in a Home/Away system.

PERIMETER ON

The perimeter is armed in an All/Perimeter system.

ALL SYSTEM ON

All areas are on.

SLEEP SYSTEM ON

The perimeter and interior areas are on but the bedroom area is off.

## **Exit Error**

This is an automatic panel function that occurs if an exit door does not close all the way after the system is armed.

For example, if the front door is left ajar upon exit and the exit delay time expires, the system attempts to arm the front door zone but recognizes the open condition. The system sounds the alarm sirens and starts the entry delay. If the open condition is not corrected, an alarm and exit error is reported to the central station.

The Exit Error feature allows the central station to acknowledge the arming error without dispatching the police on a false alarm.

# Arming and Disarming

## How Your System Operates

Your system has been programmed to operate in one of three ways: Area, All/Perimeter or Home/Sleep/Away.

- **All/Perimeter** – Your burglary protection is divided into two areas: Interior and Perimeter.

**Perimeter** arming is for when you are staying inside but want the comfort of knowing the exterior doors and windows are armed. Perimeter arming allows you to move freely about inside without setting off any interior alarms.

**All** arms both the Perimeter and the Interior of the system. You want to arm both of these areas when leaving the building and no one is left inside.

- **Home/Sleep/Away** – Your burglary protection is divided into two or three areas: Perimeter, Interior, and Bedrooms.

**Home** (Perimeter) arming is for when you are staying inside but want the comfort of knowing the exterior doors and windows are armed.

**Sleep** (Perimeter and Interior) arms all areas except those near bedrooms and nighttime areas.

**Away** (Perimeter, Interior, and Bedrooms) arms all three areas for when you leave the building and no one is left inside.

- **Area** – Your burglary protection is divided into up to six areas. Each area can have a custom name, be turned on or off independently of other areas, and limit access to only those users with proper authority.

Regardless of programming, much of the operation is similar. Throughout this guide, any differences between the systems are noted for your convenience.

## Arming Functions

**Arming:** During arming, the system verifies that all doors, windows, and other protection devices to be armed are in normal condition. If everything is normal, the system arms. If there is a problem on one or more burglary zones, the keypad displays the problem and allows you to correct the problem or bypass those zones.

If the problem can be corrected by closing a door or window, do not bypass the zone. Instead, correct the problem and try arming again. If the problem cannot be corrected, you can bypass the zone or wait until the zone can be repaired by a service technician. A bypassed zone is ignored by the system during the armed period.

In some cases the keypad might display **FRONT DOOR - FAULT**. The keypad may then display **PRIORITY ZONE**, which is a zone that cannot be bypassed. The problem on the zone must be corrected before the system can be armed.

After making your arming selection, the keypad displays any zones that are currently bypassed. These zones remain bypassed until the system is armed and then disarmed. Any 24-hour zones in a faulted condition also display.

**Armed Message:** After completing all bypasses or correcting zone faults, the areas selected are armed.

For All/Perimeter systems the keypad displays **ALL SYSTEM ON** if all areas in the system are arming or **PERIMETER ON** if only selected areas are arming.

For Home/Away or Home/Sleep/Away systems the keypad displays **ALL SYSTEM ON** if all areas in the system are arming, **HOME SYSTEM ON** or **SLEEP SYSTEM ON** if only selected areas are arming.

For an Area System the keypad displays **SYSTEM ON** if at least one area in the system is armed, followed by the area numbers that were armed. The keypad displays **ALL SYSTEM ON** if all areas in the system are armed.

**Exit Delay:** The keypad then displays the exit delay time as it counts down. If the entire system has been armed, your system beeps the exit delay tone at eight-second intervals until the last 10 seconds when the keypad beeps at three-second intervals. After exiting the building, if you re-enter during the countdown the exit countdown restarts, allowing additional time to then disarm or again exit the building during the countdown. This restart can occur only one time. When the exit delay time expires, all disarmed zones are armed. If your system uses a keyswitch to arm an area, the exit delay time does NOT count down on the keypad display.

When you arm both the Perimeter and Interior to leave the building but then you do not exit by the time the exit delay ends, the system automatically arms but the interior area(s) will remain disarmed because you have not exited.

Should you exit the building and the door does not close properly, your system may be programmed so that when the exit delay countdown ends, then the entry delay starts and the siren will sound to alert you to the situation. Enter your user code to stop the siren and disarm the system. Rearm the system, exit the building, and make sure the door is securely closed.

### **Instant Arming**

When you tap on the shield to arm your system, INSTANT is displayed below your available arming options. Tap on INSTANT to instantly arm your system. The exit delay timer will not display. If you tap on an arming option to arm your system, you can cancel the exit and entry delays and cause all zones to be instantly armed. Press ARM INSTANT while the exit delay displays. This immediately arms the exit zones. However, no entry delay is provided and an alarm immediately occurs should an entry door be opened.

**ONE MOMENT . . . Message:** If your system is monitored, it may be programmed to wait for the arming report to be sent to

the monitoring station before displaying the armed message. This verifies that the arming message was received by your monitoring station. While the system waits, the display reads **ONE MOMENT....** If the report is received, the keypad buzzes for one second and displays the armed message.

If the report is not received, the keypad displays **LOCAL ALARM ONLY** before displaying the armed message.

**Arming Report:** Your system may be pre-programmed at installation to send arming or zone bypass reports to a central station.

### **Key Fob Arming**

Press the key fob button programmed for Arming or Toggle (Arm/Disarm) button. A Red LED two-second acknowledgement indicates All System On. A Green/Red two-second acknowledgement indicates System On with some areas armed.

### **Key Fob Disarming**

Press the key fob button programmed for Disarming or Toggle (Arm/Disarm) button. A Green LED two-second acknowledgement indicates All System Off.

### **Area System Arming**

**Area Assignment:** Your security system is programmed into separate areas. The number of areas and their names are listed in the back of this guide.

**Arming or Disarming:** You can arm and disarm all areas at one time or each area individually. You can only arm or disarm areas authorized for your user code.

**All or Selective Arming:** After entering your user code, the system allows you to arm either all of the areas to which you have access or one or more selected areas. If you choose to arm all areas, the system begins verifying that all zones in those areas are in a good condition. If you choose to arm selected areas, the system prompts you to choose the areas you want to arm.



## Arming the System

1. Press the CMD key until ARM DISARM displays.
2. Select ARM to turn on all protection.
3. Enter your user code if required. The display reads ALL? NO YES.
4. Select NO to arm only selected areas. Go to step 5. Select YES to arm all areas authorized for your user code.
5. If NO is selected in step 4, the display begins to list each area to which you have access followed by NO YES. Example: OFFICE NO YES.
  - 5a. Select YES for each area you want to arm.
  - 5b. Select NO for each area you do NOT want to arm.

Note: You can also simply press the area numbers you want to arm while ALL? NO YES displays. This changes the display to AREAS:. The numbers you select appear in the display. For example: AREAS: 2 4. Press CMD when done.
6. The system displays any faulted and bypassed zones in the following order: faulted burglary zones, bypassed burglary zones, faulted 24-hour zones, and bypassed 24-hour zones.
7. At this point you can force arm or bypass any faulted burglary zones. A zone that is force armed is restored into the system if it later returns to normal. A zone that is bypassed remains bypassed until the system is disarmed. See steps 7a through 7d.
  - 7a. If a problem exists on any zones, the zone name and problem are shown followed by: OKAY BYPASS STOP.
  - 7b. Select OKAY to force arm the zone(s) before arming.
  - 7c. Select BYPASS to bypass the zone(s) before arming.

Note: 24-hour zones cannot be bypassed.
  - 7d. Select STOP to stop the system from arming. Correct the zone problem(s) and return to step 1.

8. The display reads SYSTEM ON if at least one area in the system is armed, followed by the area numbers that were armed. The display reads ALL SYSTEM ON if all areas in the system are armed.
9. The keypad then displays the exit time in seconds and counts down the remaining time: EXIT: # # (# # = seconds remaining). When the entire system is armed, the keypad sounds the exit delay alert and when the delay expires, all zones are armed.

## Area System Disarming

**Disarming:** While the system is armed, you can only enter the premises through an exit/entry delay door without causing an alarm. After opening the door, the keypad sounds a prewarn tone to remind you to disarm the system. You must disarm the system before the delay time expires or an alarm on the door zone occurs.

During the prewarn tone, the keypad displays **ENTER CODE:** Enter your user code to disarm the system. Only those areas authorized for your user code disarm.

**Note:** Your keypad will silence the tone as soon as the first user code digit key is pressed. If a valid user code is not entered within 5 seconds or an invalid user code is entered, the prewarn tone begins sounding again.

**All or Selective Disarming:** After entering your user code, the system allows you to disarm either all of the areas to which you have access or just selected areas. If you choose to disarm all areas, the system automatically disarms them. If you choose to disarm selected areas, the names of those areas display on the keypad.

**Alarm Display:** After disarming, the keypad displays any zones that went into alarm or any communication problems that occurred during the armed period. All burglary zones are then disarmed and any bypassed zones are automatically reset.

**Disarmed Message:** The keypad displays **ALL SYSTEM OFF** after the system disarms.

**Central Station Report:** Your system may be pre-programmed at installation to send a report of the disarming to the central station.

**Z-Wave Lock Disarming:** If your system is installed with a Z-Wave compatible lock, a valid user code entered at the lock will unlock the door and disarm the areas to which you have access.

### Disarming During an Alarm

1. While the alarm siren sounds, enter your user code to silence the alarm. The keypad tone silences as soon as the first key is pressed.

For a burglary alarm, the keypad displays **IS THIS A FALSE ALARM? NO YES** or **CANCEL VERIFY**.

This allows you to investigate the alarm prior to disarming the system. This display remains on the keypad until a selection is made, the Back Arrow is pressed, or the internal system bell cutoff timer expires.

2. If a valid alarm has not occurred, select **YES** or **CANCEL** to disarm the system and cancel the alarm.

The keypad next displays **ALL SYSTEM OFF** to confirm the system is disarmed.

OR

If the alarm is valid, select **NO** or **VERIFY** to send a verify message to the Central Station. The system will remain armed.

### Disarming an Area System

1. Press the **CMD** key until **ARM DISARM** displays. During entry delay this process starts at step 3 below.
2. Select **DISARM** to disarm areas.
3. The keypad displays **ENTER CODE: .** Enter your user code and press **CMD**. The keypad displays **ALL? NO YES**.
4. Select **YES** to disarm all areas authorized for your user code.
  - 4a. Select **NO** to disarm only certain areas individually.

The keypad then displays the name of each area authorized for your code followed by the **NO YES** display.

- 4b. Select **YES** to disarm the area displayed.

- 4c. Select **NO** to not disarm and to display the next area.

Note: You can also just press the area numbers you want to disarm while at the **ALL? NO YES** display. This changes the display to **AREAS: .** The area numbers you select appear in the display. For example: **AREAS: 2 4.**

5. To remove an area number from the display, press its corresponding number on the keypad. Press **CMD** when done.
6. After all areas have displayed, any alarms or communication problems that occurred during the armed period are shown.
7. If all areas are disarmed, the keypad displays **ALL SYSTEM OFF**.

### All/Perimeter System Arming

**Area Assignment:** Your security system is divided into two separate areas. Motion detectors, inside doors, and other interior protection devices are assigned to the *Interior* area while windows and exterior doors are assigned to the *Perimeter* area.

**Perimeter or All:** When arming an All/Perimeter system, the keypad displays **PERIM ALL**. If you select **ALL**, you arm both the Perimeter and the Interior of the system. You want to arm both of these areas when leaving with nobody left inside. Selecting **PERIM** arms only the Perimeter of the system. Perimeter arming is for when you are staying inside but want the comfort of knowing the exterior doors and windows are armed. Perimeter arming allows you to move freely about inside without setting off any interior alarms.

## System Ready/System Not Ready Keypad Displays

When all zones in the system are in a normal condition, the keypad displays SYSTEM READY. If there are one or more zones that are not in a normal condition, the keypad displays SYSTEM NOT READY. Pressing any select key or area during this display shows the zone name allowing you to investigate the problem.

## Instant Arming

When you tap on the shield to arm your system, INSTANT is displayed below your available arming options. Tap on INSTANT to instantly arm your system. The exit delay timer will not display. If you tap on an arming option to arm your system, you can cancel the exit and entry delays and cause all zones to be instantly armed. Press ARM INSTANT while the exit delay displays. This immediately arms the exit zones. However, no entry delay is provided and an alarm immediately occurs should an entry door be opened.

## All/Perimeter Shortcut Key Arming

Arm Perimeter — Press 6 for 2 seconds.

Arm All— Press 1 for 2 seconds.

## Arming an All/Perimeter System

1. Enter your code. The keypad displays PERIM ALL.
2. Select PERIM to arm the Perimeter area only.
3. Select ALL to arm both the Perimeter and Interior areas.
4. The system displays any faulted and bypassed zones in the following order: faulted burglary zones, bypassed burglary zones, faulted 24-hour zones, and bypassed 24-hour zones.
5. At this point you can force arm or bypass any faulted burglary zones. A zone that is force armed is restored into the system if it later returns to normal. A bypassed zone remains bypassed until the system is disarmed. See steps 5a through 5d.
  - 5a. If a problem exists on any zones, the zone name and problem display followed by: OKAY BYPASS STOP.

*Arming and Disarming*

5b. Select OKAY to force arm the zone(s) before arming.

5c. Select BYPASS to bypass the zone(s) before arming.

5d. Select STOP to stop the system from arming. Correct the zone problem(s) and return to step 1.

6. The keypad displays PERIMETER ON if only the perimeter is being armed and ALL SYSTEM ON if both the perimeter and interior are being armed.
7. The keypad next displays EXIT: ## INSTNT and begins to count down the number of seconds remaining for you to exit. If the entire system is armed, the keypad sounds the exit delay alert and when the delay expires, all zones are armed.
8. You can select INSTNT while EXIT: ## INSTNT displays to immediately arm all zones and make them instant. The keypad displays INSTANT. When you select INSTANT, any entry/exit zone that trips immediately activates an alarm and the exit delay countdown immediately stops.
9. When the system is armed, the keypad displays PERIMETER ON for perimeter arming and ALL SYSTEM ON for perimeter and interior arming.

## All/Perimeter System Disarming

**Disarming:** While the system is armed, you can only enter the premises through an entry/exit delay door without causing an alarm. After opening the door, the keypad sounds a prewarn tone to remind you to disarm the system. You must disarm the system before the prewarn tone expires or an alarm on the door zone occurs.

During the prewarn tone, the keypad displays ENTER CODE:. Enter your user code to disarm the system.

**Note:** Your keypad will silence the tone as soon as the first user code digit key is pressed. If a valid user code is not entered within 5 seconds or an invalid user code is entered, the prewarn tone begins sounding again.

**Alarm Display:** After disarming, the keypad displays any zones that tripped or any transmission problems that occurred during

the armed period. All burglary zones are then disarmed and any bypassed zones automatically reset.

**Disarmed Message:** The keypad displays **ALL SYSTEM OFF** after the system disarms.

**Central Station Report:** Your system may be pre-programmed at installation to send a report of the system disarming to the central station.

**Z-Wave Lock Disarming:** If your system is installed with a Z-Wave compatible lock, a valid user code entered at the lock will unlock the door and disarm the system.

### **Disarming an All/Perimeter System**

1. During the entry delay time, the keypad displays **ENTER CODE:.** Enter your user code.
2. The keypad displays any zones that went into alarm and any communication problems that occurred during the armed period.
3. The keypad next displays **ALL SYSTEM OFF** to confirm the system is disarmed.

### **Disarming During an Alarm**

1. While the alarm siren sounds, enter your user code to silence the alarm. The keypad tone silences as soon as the first key is pressed.

For a burglary alarm, the keypad displays **IS THIS A FALSE ALARM? NO YES** or **CANCEL VERIFY**.

This allows you to investigate the alarm prior to disarming the system. This display remains on the keypad until a selection is made, the Back Arrow is pressed, or the internal system bell cutoff timer expires.

2. If a valid alarm has not occurred, select **YES** or **CANCEL** to disarm the system and cancel the alarm.

The keypad next displays **ALL SYSTEM OFF** to confirm the system is disarmed.

OR

If the alarm is valid, select **NO** or **VERIFY** to send a verify message to the Central Station. The system will remain armed.

## **Home/Away System Arming**

**Area Assignment:** Your security system is divided into two or three separate areas. Motion detectors, inside doors, and other interior devices are assigned to an Interior and possibly Bedroom area while windows and exterior doors, are assigned to a Perimeter area.

**Arming the system:** When arming a Home/Away system, the keypad displays **HOME AWAY** or **HOME SLEEP AWAY**. If you select **AWAY**, you arm all areas of the system. You want to arm all areas when leaving with nobody staying inside.

Selecting **HOME** arms only the system Perimeter. Perimeter arming is for when you are staying inside but want the comfort of knowing the exterior doors and windows are armed.

Selecting **SLEEP** arms the Perimeter and Interior devices but leaves devices near bedrooms and other nighttime areas off.

### **System Ready/System Not Ready Keypad Displays**

When all system zones are in a normal condition and can be armed without bypassing, the keypad displays **SYSTEM READY**. If there are one or more zones that are not in a normal condition, the keypad displays **SYSTEM NOT READY**. Pressing any select key or area during this display shows the faulted zone name.

### **Instant Arming**

When you tap on the shield to arm your system, **INSTANT** is displayed below your available arming options. Tap on **INSTANT** to instantly arm your system. The exit delay timer will not display. If you tap on an arming option to arm your system, you can cancel the exit and entry delays and cause all zones to be instantly armed. Press **ARM INSTANT** while the exit delay displays. This immediately

arms the exit zones. However, no entry delay is provided and an alarm immediately occurs should an entry door be opened.

### Home/Sleep/Away Shortcut Key Arming

**Arm Home** – Press 3 for 2 seconds to arm the perimeter.

**Arm Sleep** – Press 7 for 2 seconds to arm the perimeter and interior areas and leave the bedroom area off.

**Arm Away** – Press 1 for 2 seconds.

### Arming a Home/Away System

1. Enter your user code. The keypad displays HOME AWAY or HOME SLEEP AWAY (you may have three areas).
2. Select HOME to arm the Perimeter only.
3. Select SLEEP to arm the Perimeter and Interior.
4. Select AWAY to arm the Perimeter, Interior, and Bedroom.
5. The system displays any faulted and bypassed zones in the following order: faulted burglary zones, bypassed burglary zones, faulted 24-hour zones, and bypassed 24-hour zones.
6. At this point you can force arm or bypass any faulted burglary zones. A zone that is force armed is restored into the system if it later returns to normal. A zone that is bypassed remains bypassed until the system is disarmed. See the steps below.
  - 6a. If a problem exists on any zones, the zone name and problem display followed by: OKAY BYPASS STOP.
  - 6b. Select OKAY to force arm the zone(s) before arming.
  - 6c. Select BYPASS to bypass the zone(s) before arming.
  - 6d. Select STOP to stop the system from arming. Correct the zone problem(s) and return to step 1.
7. The keypad displays HOME SYSTEM ON if you selected HOME, or SLEEP SYSTEM ON if you selected SLEEP, or ALL SYSTEM ON if you selected AWAY.
8. The keypad next displays EXIT: ## INSTNT and begins to count down the number of seconds remaining for you to

exit. The keypad sounds the exit delay alert and when the delay expires, all zones are armed.

9. You can select INSTNT while EXIT: ## INSTNT displays to immediately arm all zones and make them instant. The keypad displays INSTANT. When you select INSTANT, any entry/exit zone that trips immediately activates an alarm and the exit delay countdown immediately stops.
10. When the system is armed, the keypad displays HOME SYSTEM ON for Perimeter arming, SLEEP SYSTEM ON for Perimeter and Interior arming, and ALL SYSTEM ON for all areas armed.

### Home/Away System Disarming

**Disarming:** While the system is armed, you can only enter the premises through an entry/exit delay door without causing an alarm. After opening the door, the keypad sounds a prewarn tone to remind you to disarm the system. You must disarm the system before the prewarn tone expires or an alarm on the door occurs.

During the prewarn tone, the keypad displays **ENTER CODE:.** Enter your code to disarm the system.

**Note:** Your keypad will silence the tone as soon as the first user code digit key is pressed. If a valid user code is not entered within 5 seconds or an invalid user code is entered, the prewarn tone begins sounding again.

**Alarm Display:** After disarming, the keypad displays any zones that tripped or any communication problems that occurred during the armed period. All burglary zones are then disarmed and any bypassed zones automatically reset.

**Disarmed Message:** The keypad displays **ALL SYSTEM OFF** after the system disarms.

**Central Station Report:** Your system may be pre-programmed at installation to send a report of the system disarming to the central station and/or to your cell phone.

**Z-Wave Lock Disarming:** If your system is installed with a Z-Wave compatible lock, a valid user code entered at the lock will unlock the door and disarm the system.

### Disarming a Home/Away System

1. During entry delay, the keypad displays ENTER CODE:. Enter your user code.
2. The keypad then displays any alarms or communication problems that occurred during the armed period.
3. The keypad next displays ALL SYSTEM OFF to confirm the system is disarmed.

### Disarming During an Alarm

1. While the alarm siren sounds, enter your user code to silence the alarm. The keypad tone silences as soon as the first key is pressed.

For a burglary alarm, the keypad displays IS THIS A FALSE ALARM? NO YES or CANCEL VERIFY.

This allows you to investigate the alarm prior to disarming the system. This display remains on the keypad until a selection is made, the Back Arrow is pressed, or the internal system bell cutoff timer expires.

2. If a valid alarm has not occurred, select YES or CANCEL to disarm the system and cancel the alarm.

The keypad next displays ALL SYSTEM OFF to confirm the system is disarmed.

OR

If the alarm is valid, select NO or VERIFY to send a verify message to the Central Station. The system will remain armed.

## Keypad Shortcut Keys

Your 9000 Series keypads provide one-button shortcut keys. Holding down the selected keypad button for two seconds until the tone re-sounds allows you to arm, monitor, or reset your system. These options can still be accessed through the User Menu if desired.

### Keypad Key

Press Key 1

Press Key 2

Press Key 3

Press Key 4

Press Key 5

Press Key 6

Press Key 7

Press Key 8

### Arming System Operation

Arm All for All/Perimeter systems

Arm Away for Home/Sleep/Away systems

Sensor (Fire) Reset on all systems

Arm Home for Home/Sleep/Away systems


Check-in Report on all systems

Chime (Monitor) on all systems

Arm Perimeter for All/Perimeter systems

Arm Sleep for Home/Sleep/Away systems

Easy Exit for Home/Sleep/Away systems

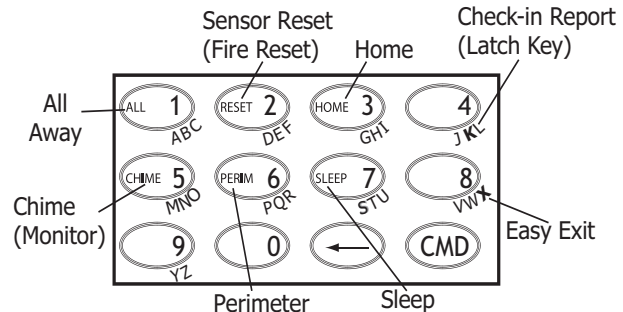

Keypad Shortcut Keys

## Arming Function

**System Operation:** Home/Sleep/Away, or All/Perimeter.

You can use the Arming shortcut keys, 1, 3, 6, and 7 when the system is disarmed. You may be prompted to enter your user code. If any zones are faulted, select force arm or bypass. Refer to the Arming Section for detailed arming operation.

### Home/Sleep/Away Arming

**Arm Home** – Press 3 for 2 seconds to arm the perimeter.

**Arm Sleep** – Press 7 for 2 seconds to arm the perimeter and interior areas and leave the bedroom area off. This shortcut key is available when the system is disarmed and when the system is armed for Home mode.

**Arm Away** – Press 1 for 2 seconds.

### All/Perimeter Arming

**Arm Perimeter** – Press 6 for 2 seconds.

**Arm All**– Press 1 for 2 seconds.

## Sensor (Fire) Reset Function

**System Operation:** Area, Home/Sleep/Away, or All/Perimeter.

You can use the Sensor (Fire) Reset, shortcut key 2, when the system is armed or disarmed. When pressed, detectors that have latched due to an alarm condition are now restored and returned to normal function. The keypad displays SENSORS ON and SENSORS OFF to acknowledge the shortcut key press.

**Note:** You are prompted to enter your User Code on Area or All/Perimeter systems.

## Chime (Monitor) Function

**System Operation:** Area, Home/Sleep/Away, or All/Perimeter.

You can use the Chime (Monitor), shortcut key 5, when the system is disarmed. When pressed, the Zone Monitor operation is initiated. As needed, refer to the Zone Monitor section. The keypad displays MONITOR ON and chimes or displays MONITOR OFF and no tone is sounded.

**Note:** The Chime (Monitor) shortcut key applies to all Exit zones in an Area system and to all zones assigned to the perimeter in a Home/Sleep/Away or All/Perimeter system.

## Check-in Report (Latch Key) Function

**System Operation:** Area, Home/Sleep/Away, or All/Perimeter.

Your system may be pre-programmed at installation to send messages to your cell phone. You can use the Check-in Report (Latch Key), shortcut key 4, to have a Check-in Report message sent. Refer to Appendix D for Cell phone message information.

## Easy Exit™ Function

**System Operation:** Home/Sleep/Away.

You can use the Easy Exit, shortcut key 8, when the system is armed, to restart the exit delay allowing you to exit the premises without disarming the system. For example, to let a pet out or retrieve the newspaper. After the exit delay time expires, the system automatically rearms.

You can also press the Easy Exit, shortcut key 8 again, to cancel the exit delay countdown. For example, the telephone rings before you retrieve the newspaper so you press shortcut key 8 to rearm the system.

## User Menu

Many of your system features have been put into a User Menu that you can access from a 32-character keypad. The menu requires you to enter your user code. Only those functions to which you have access display.

### Accessing the User Menu

1. Press the CMD key until **MENU? NO YES** displays.
2. Select **YES**. The keypad displays **ENTER CODE: — .** Enter your user code. You can now scroll down through the list of system features available to you.

### User Menu Options

The following list shows the User Menu options in order:

| Menu Option         | Description  |
|---------------------|--|
| USER CHECKIN        | Allows check-in with the system to indicate arrival on premises.   |
| ZONE ACTIVITY CHECK | Allows you to monitor a zone for non-activity.   |
| SENSOR RESET        | Clears Fire and Supervisory zone alarm and trouble displays from the status list. Reset also clears low battery displays from wireless sensors that have restored. |
| OUTPUTS ON/OFF      | Allows you to turn on or off any of the outputs described in the System Setup section of this guide.   |
| FAVORITES           | Allows you to activate any Favorite described in the System Setup section of this guide.   |

#### Z-WAVE SETUP

Allows you to add, list, remove, transfer, and optimize Z-Wave devices in your system. You can create Z-Wave Favorites, add, edit, and remove Z-Wave devices in Favorites.

#### WIFI SETUP

Allows you to add, remove or test Wi-Fi service when equipped.

#### BYPASS ZONES

Allows you to Bypass a zone or reset an already bypassed zone. **ZONE MONITOR (CHIME)** Allows you to add or remove a zone from the monitor (chime) mode.

#### ZONE MONITOR

Allows you to add or remove a zone from the monitor mode.

#### SYSTEM TEST

Tests the system siren, communication to the central station, and backup battery.

#### USER CODES

Allows you to add, delete, or change user codes and authority levels.

#### SCHEDULES

Allows you to add, remove, or change system schedules.

#### TIME

Allows you change the Time, Day, and Date that is currently in the system.

#### DISPLAY EVENTS

Allows you to view the last 100 events that occurred on your system.

#### REQUEST SERVICE

Allows you to send a message to the Central Station requesting service on the alarm system.

The following pages detail each User Menu item and provide instructions on when and how to use them properly.



## User Check-in

**User Code Level:** Master or Standard.

**Function:** This feature allows you to monitor the arrival of children from school or employees to work by having a special Check-in Report sent to your cell phone if programmed.

Appendix D describes the Cell Phone option.

### Sending a Check-in Report

1. After disarming the system, access the User Menu.
2. At the USER CHECKIN? display, press any select key or area. The keypad displays USER CHECKIN: 22 (22 = user number).
3. The panel sends the Check-in Report containing your account number and user number to the cell phone number.

### Check-in (Latch Key) Report Shortcut Key

**All Systems** — Press 4 for 2 seconds, then enter your user code to send a Check-in Report.

## Zone Activity Check

**User Code Level:** Master or Standard.

**Function:** Your security system may be pre-programmed at installation for the Zone Activity Check feature allowing you to monitor a person for non-activity.

When no activity is detected for the programmed time period, your keypad sounds a steady tone for a set period of time and displays **PRESS ANY KEY**. Pressing any key on the keypad, before the steady tone stops, prevents your system from sending a “User Activity Not Detected” report to the central station. Pressing the key also restarts the zone activity timer.

This could be used for a person living alone to detect when they have not moved about to trip a disarmed zone within a programmed period of time. This feature is optional.

**Note:** The Zone Activity Check is disabled when a schedule is activated to allow for sleeping hours and is automatically enabled when an area is disarmed.

### Selecting Zone Activity Check

1. At the ACTIVITY CHECK? display, press any select key or area. The keypad displays ENABLE? NO YES. The default is YES.
2. When YES is selected, the keypad displays CHECK ENABLED for four seconds and then sends the Activity Check Enabled message to the central station.
3. When NO is selected, the keypad displays CHECK DISABLED for four seconds and then sends the Activity Check Disabled message to the central station.

## Sensor Reset

**User Code Level:** Master or Standard.

**Function:** Clears Fire and Supervisory zone alarms and trouble keypad displays. Sensor Reset also clears low battery displays from wireless sensors that have restored.

Make sure all smoke is cleared from around the area of the smoke detectors before performing a Sensor Reset to prevent the alarm from occurring again.

### Resetting the Sensors

1. Access the User Menu.
2. When SENSOR RESET? displays, press any select key or area. The keypad displays SENSORS OFF for five seconds followed by SENSORS ON.
3. The keypad returns to the status display.

### Sensor (Fire) Reset Shortcut Key

**All Systems** — Press 2 for 2 seconds, then enter your user code if required, to reset the system.

## Outputs On Off

**User Code Level:** Master or Standard.

**Function:** Allows you to turn the system outputs on and off.

This function is used to individually turn your system outputs on and off. Your system may use these outputs to control interior and exterior lighting, or heating, air conditioning, or other appliances. The system output names and numbers are located in the System Setup section at the back of this guide.

## Turning the Outputs On and Off

1. Access the User Menu.
2. Press the CMD key until OUTPUTS ON/OFF? displays.
3. Press any select key or area.
4. The keypad displays OUTPUT: - ON OFF.
5. Enter the output number you want to turn on or off. The output number appears in the display.
6. With the output number displayed, select ON or OFF. The output is then turned on or off, depending on your selection, and remains in that state until you change it.
7. The system automatically removes the output number and a new output number can be entered. Refer back to step 5. To exit the Output menu option, press the Back Arrow key until you return to the keypad Status List.

## Favorite

**User Code Level:** Master or Standard.

Allows you to activate a Z-Wave Favorite. Z-Wave devices can be grouped together to create Favorites. Favorites can only be activated, or turned on. A separate Favorite must be created to change the conditions set by the first Favorite. For a complete description on how to add a Favorite to activate, see **Adding a FAVORITE** in Z-Wave Setup.

1. When FAVORITES? displays, press any select key or area. The keypad displays FAVORITE: -.
2. Enter a Favorite number from 1-20. Pressing CMD activates the Favorite.

## Z-Wave Setup

**User Code Level:** Master only.

**Note:** Z-Wave compatibility is only available with XTL+Z and XTL+WZ panels.

Z-Wave allows short range radio control of Z-Wave devices that you or your installation company may provide such as lighting control modules, thermostat controls, and door locks. Z-Wave Setup allows you to program the system to control the Z-Wave devices. You may control your Z-Wave devices from your iPhone/iPad or Android device using the DMP Virtual Keypad App or from your keypad by activating a Favorite from the Favorites User Menu. The available setup options are: Add, List, Remove, Favorites, Transfer and OPTover.

- Select ADD to add a Z-Wave device to your system.
- Select LIST to display a list of Z-Wave devices already added and stored in your system.
- Select REMOVE to completely remove a Z-Wave device from your system.
- Select FAV to Add, Edit or Remove a Favorite.
- Select XFER to transfer Z-Wave device information from another manufacturer's portable Z-Wave controller to your system.
- Select OPT to update communication with all Z-Wave devices programmed on your system. OPT can be used to re-establish communication after a Z-Wave device has been moved to a different location.

## Add Z-Wave Devices (ADD)

This option allows you to ADD one or more Z-Wave device to your system. Once added, a Z-Wave device may be assigned to a Favorite.

1. Access the User Menu.
2. Press CMD until ZWAVE SETUP? displays.
3. Press any select key or area. The keypad displays ADD LIST REMOVE.
4. Select ADD. PROCESSING may briefly display. When PRESS BUTTON ON DEVICE TO ADD displays press the program button on the Z-Wave device. See the Z-Wave device's documentation for more information.
5. When the device information is received by the system, the keypad beeps once and displays DEVICE FOUND.
6. When the device is added PRESS BUTTON ON DEVICE TO ADD displays. If you are adding multiple devices, press the program button on the next device and wait for PRESS BUTTON ON DEVICE TO ADD to display. Repeat this process until all your devices are added.  
**Note:** Take note of the order in which you add devices. You will name the devices in the same order they were added.
7. Press CMD. The keypad displays the type of device and the default device name for the first device you added.
8. Press any top row select key or area and enter up to a 16 character custom name for the device. See Entering Names in Appendix D.
9. Press the CMD key to store the new name.

**Note:** A maximum of 140 Z-Wave devices can be added to the system. When the maximum number of devices have been added, the keypad displays ZWAVE TABLE FULL and no additional Z-Wave devices may be added without removing some existing devices.

## List Z-Wave Devices (LIST)

This option allows you to edit the name of a Z-Wave device or confirm radio communication with the Z-Wave device. When LIST is selected, the first Z-Wave device stored in the system is displayed. Remaining devices can be viewed by pressing the CMD key. Lighting control modules, are displayed first, followed by door locks and then thermostat controls.

The available LIST options are: Rename and Status.

- Select STATUS to enter up to 16 characters for a new device name.
- Select STATUS to confirm radio communication with the Z-Wave device.

## RENAME Z-Wave Devices

1. Access the User Menu.
2. Press CMD until ZWAVE SETUP? displays.
3. Press any select key or area. The keypad displays ADD LIST REMOVE.
4. Select LIST to display DEVICE LIST and the first Z-Wave device stored. Press the CMD key to advance through the list of Z-Wave devices.
5. Press any select key or area to display DEVICE RENAME STATUS.
6. Select RENAME and enter up to 16 characters for a new device name. See Entering Non-Alpha Characters in the Introduction or Entering User Names in Appendix C.
7. Press CMD to save the new Z-Wave device name and return to the DEVICE LIST.

## STATUS of Z-Wave Devices

1. Access the User Menu.
2. Press CMD until ZWAVE SETUP? displays.
3. Press any select key or area. The keypad displays ADD LIST REMOVE.

4. Select LIST to display DEVICE LIST and the first Z-Wave device stored. Press the CMD key to advance through the list of Z-Wave devices.
5. Press any select key or area to display DEVICE RENAME STATUS.
6. Select STATUS to confirm radio communication with the Z-Wave device.
7. The device name and OKAY displays when the device stored in the system communicates.
8. Press the CMD key to return to the device list and display the next device in the list.
9. If the device stored in the system does not communicate, the device name and FAILED displays. Press the CMD key and REMOVE FAILED DEVICE displays.
10. Select YES to remove the failed device from the system memory. Select NO to leave the device in the system memory and to return to the device list.
11. When the device has been removed, the device name and REMOVED is displayed and the system no longer tries to communicate with the Z-Wave device.

## Remove Z-Wave Devices (REMOVE)

Each Z-Wave device added to your system remains in your system unless it is removed. This option allows you to remove Z-Wave devices from your system.

1. Access the User Menu.
2. Press CMD until ZWAVE SETUP? displays.
3. Press any select key or area. The keypad displays ADD LIST REMOVE.
4. Select REMOVE. PROCESSING may briefly display. When PRESS BUTTON ON DEVICE TO REMOVE displays, press the program button on the Z-Wave device, the device name and REMOVED is displayed to indicate the Z-Wave

device has been removed.

5. PRESS BUTTON ON DEVICE TO REMOVE displays allowing you to remove another Z-Wave device. See the Z-Wave device's documentation for more information.
6. When all devices have been removed, press the back arrow.

### **Favorites (FAV)**

Z-Wave devices can be grouped together to create a Favorite. This option allows you to program up to 20 Favorites in your system and then ADD, CHANGE, or DELETE up to 25 Z-Wave devices in a Favorite. When activated from the FAVORITE user menu, a command is sent to its Z-Wave Devices. A Favorite can only be activated, or turned on. A separate Favorite must be created to change the conditions set by the first Favorite. For example, a Favorite called "Movie Night" could lock the exterior doors, close the garage door, adjust the temperature, and dim the lights in the family room to the desired level. Another Favorite called "Wakeup" could then turn on the lights, adjust the temperature, unlock the exterior doors, and raise the garage doors.

### **Adding a FAVORITE**

1. Access the User Menu.
2. Press CMD until ZWAVE SETUP? displays.
3. Press any select key or area. The keypad displays ADD LIST REMOVE.
4. Press CMD again to display FAV XFER OPT. Select FAV and FAVORITE NUMBER: - is displayed.
5. Enter a Favorite number between 1 and 20 and press CMD. If the Favorite number entered is unassigned, \*UNUSED\* displays. If the Favorite is already assigned, you may change the name or press the back arrow and enter a new number.
6. Press any select key or area and a cursor displays. Enter a

Favorite name up to 16 characters. To remove a Favorite, press CMD without entering a name. See Entering Non-Alpha Characters in the Introduction or Entering User Names in Appendix C.

7. Press CMD to save the Favorite and the Favorite name and ADD CHANGE DELETE displays.

### **ADD Devices to FAVORITES**

1. Access the User Menu.
2. Press CMD until ZWAVE SETUP? displays.
3. Press any select key or area. The keypad displays ADD LIST REMOVE.
4. Press CMD again to display FAV XFER OPT. Select FAV.
5. ADD DEL CHG displays. Select ADD.
6. FAVORITE NUMBER: - is displayed. Enter a Favorite number between 1 and 20 and press CMD.
7. The Favorite number displays. Press any top row select key or area and enter a Favorite Name.
8. Press CMD and the Favorite Name and ADD EDIT REMOVE displays.
9. Select ADD and the first Z-Wave device stored in the system that has not already been added to this Favorite is displayed. Remaining devices can be viewed by pressing the CMD key.
10. Press any select key or area to assign the displayed device to the Favorite. The device name and the current device settings display. When added to a Favorite, a Z-Wave device can be programmed to respond to various ON/OFF/LOCK/UNLOCK/OPEN/CLOSE/HEAT/COOL CMDs based on your desired settings. To change a device setting, See Device Settings in Favorites.

## Device Settings in FAVORITES

### Lights

1. Press any select key or area at SETTING: and ON OFF DIM displays. Press the select key or area under the desired setting.
2. For ON or OFF setting, when selected, the Favorite name and the next Z-Wave device stored in the system displays.
3. For DIM setting, DIM LEVEL: with the current setting displays. To change the setting, press any select key or area and enter the new level (1 - 10) and Press CMD.
4. The Favorite name and the next Z-Wave device stored in the system displays.

### Locks

1. Press any select key or area at SETTING: and LOCK UNLOCK displays. To change the setting, press the select key or area under the new setting.
2. The Favorite name and the next Z-Wave device stored in the system displays.

### Thermostats

1. Press any select key or area at SYSTEM: and OFF CL HT displays. To change the setting of OFF, COOL or HEAT, press the select key or area under the new setting.
2. Select OFF to display FAN SETTING:.
3. Press any select key or area and ON AUTO displays. Press the select key or area under the desired new setting to change.
4. Select CL to display COOL.
5. To change the setting, press any select key or area, enter the new temperature and press CMD.
6. Press any select key or area and the keypad displays FAN SETTING:.
7. Press any select key or area and ON AUTO displays. Press the select key or area under the desired new setting to change.

8. Select HT to display HEAT.

9. To change the setting, press any select key or area and enter the new temperature and Press CMD.

10. Press any select key or area and the keypad displays FAN SETTING:.

11. Press any select key or area and ON AUTO displays. Press the select key or area under the desired new setting to change.

12. The Favorite name and the next Z-Wave device stored in the system displays.

**Note:** A maximum of 25 devices can be assigned to each Favorite. When attempting to add a device and the maximum number of devices has been assigned, FAVORITE FULL is displayed. No additional Z-Wave devices may be added to this Favorite, however a new Favorite may be created and devices added to the new Favorite.

### EDIT Devices in FAVORITES

1. Access the User Menu.

2. Press CMD until ZWAVE SETUP? displays.

3. Press any select key or area. The keypad displays ADD LIST REMOVE.

4. Press CMD again to display FAV XFER OPT. Select FAV.

5. ADD DEL CHG displays. Select CHG.

6. FAVORITE NUMBER: - is displayed. Enter a Favorite number between 1 and 20 and press CMD.

7. The Favorite number and name displays. Press CMD and the Favorite Name and ADD EDIT REMOVE displays.

8. Select EDIT and the first Z-Wave device stored in the Favorite displays. Remaining devices can be viewed by pressing the CMD key.

**Note:** Z-Wave devices are displayed by device type; Lights first,

followed Locks, and Thermostats last. By pressing the CMD key you can scroll through the devices assigned to the selected Favorite.

9. Press any select key or area to display the device name and the setting for the device.
10. To change the setting, See Device Settings in Favorites.
11. Once the device settings have been entered, the Favorite name and the next Z-Wave device stored in the selected Favorite displays.

### **REMOVE Devices from FAVORITES**

1. Access the User Menu.
2. Press CMD until ZWAVE SETUP? displays.
3. Press any select key or area. The keypad displays ADD LIST REMOVE.
4. Press CMD again to display FAV XFER OPT. Select FAV.
5. ADD DEL CHG displays. Select DEL.
6. FAVORITE NUMBER: - is displayed. Enter a Favorite number between 1 and 20 and press CMD.
7. The Favorite number and name displays. Press CMD and the Favorite Name and ADD EDIT REMOVE displays.
7. Select REMOVE and the first Z-Wave device stored in the Favorite displays. Remaining devices can be viewed by pressing the CMD key.
8. Press any select key or area to remove the device from the Favorite. REMOVE DEVICE FROM FAV? NO YES displays. When YES is selected, the device is removed from the Favorite.

### **Transfer Controller (XFER)**

This option allows the transfer of all existing Z-Wave devices that are currently programmed in another manufacturer's Z-Wave portable controller to your system.



This operation will overwrite all Z-Wave devices that are programmed in your system. This option typically occurs at the time your DMP Z-Wave controller is installed.

Initiate the transfer at the other manufacturer's Z-Wave portable controller after starting the transfer on the DMP keypad. Z-Wave devices are NOT overwritten until the transfer has been initiated at the other manufacturer's Z-Wave portable controller. The transfer should not be stopped once the process has been initiated from the other manufacturer's Z-Wave portable controller.

### **Transfer Operation:**

1. Access the User Menu.
2. Press CMD until ZWAVE SETUP? displays.
3. Press any select key or area. The keypad displays ADD LIST REMOVE.
4. Press CMD again to display FAV XFER OPT. Select XFER. The keypad displays XFER WILL DELETE EXISTING DEVICES then displays XFER CNTRL SURE? YES NO.
5. Select YES to allow receipt of Z-Wave devices to your system. The keypad displays TRANSFERRING Z-WAVE DEVICES. Pressing the Back Arrow key cancels the transfer. Select NO to exit the XFER menu and return to ZWAVE SETUP?. All programming will still be intact on the DMP Z-Wave controller and will cancel the transfer.
6. Initiate the transfer at the other manufacturer's Z-Wave portable controller. All Z-Wave devices are added to the system with a default name (device type and number). A 16-character name may be assigned to the Z-Wave devices after the transfer is complete. When the transfer is complete the screen will display ZWAVE SETUP?.

**Note:** If TRANSMISSION FAILED displays on the screen, your system memory is cleared of all prior Z-Wave devices programming and will need to add each Z-Wave device individually.

### **Optimize (OPT)**

This option allows your system to search for and re-establish communication with Z-Wave devices that may have failed to communicate. Only Z-Wave devices already programmed into your system are included in the optimize search. Any programmed Z-Wave device that is not found during optimize will be deleted from your system.

1. Access the User Menu.
2. Press CMD until ZWAVE SETUP? displays.
3. Press any select key or area. The keypad displays ADD LIST REMOVE.
4. Press CMD again to display FAV XFER OPT.
5. Select OPT, the keypad displays OPTIMIZING ZWAVE DEVICES while the system is searching for Z-Wave devices.
6. When the optimization is complete, the keypad returns to ZWAVE SETUP?

## **Wi-Fi Setup**

**User Code Level:** Master.

Your system may include Wi-Fi Setup in the User Menu. If enabled, Wi-Fi Setup allows you to add, remove or test Wi-Fi Networks in your system when equipped. Press CMD to display the available Wi-Fi Setup options WPS, List, Manual, and press CMD again to display TEST.

- Select WPS to automatically connect a Wi-Fi network to your system.
- Select List to display a list of Wi-Fi networks in range of your system.
- Select Manual to enter the Wi-Fi network name to your system.
- Select Test to verify connection of your system to the Wi-Fi network.

### **WPS**

1. Press the WPS button on the selected Wi-Fi network router to start the pairing operation.
2. Access the User Menu.
3. Press CMD until WIFI SETUP? displays.
4. Press any select key or area. The keypad displays WPS LIST MANUAL.
5. Select WPS and SEARCHING displays. The panel will search for the Wi-Fi network router attempting to pair. When WPS is successful, CONNECTED displays on the keypad. If WPS is unsuccessful, WPS FAILED RETRY? NO YES displays. Press YES and the panel will search for the Wi-Fi network router attempting to pair. Press NO and WPS LIST MANUAL displays.

### **List**

1. Access the User Menu.
2. Press CMD until WIFI SETUP? displays.
3. Press any select key or area. The keypad displays WPS LIST MANUAL.



4. Select LIST and SEARCHING displays. The panel will search for available Wi-Fi networks that are in range. Once available Wi-Fi networks are found the keypad displays the SSID NAME (Wi-Fi Network name) and signal strength of each network. Press CMD to scroll through the available Wi-Fi networks. When the desired network is displayed, press any select key or area to connect.
5. When connecting to the Wi-Fi network the panel will also detect the security type in use and W/L KEY: \*\*\*\*\* displays.

**Note:** If the panel is unable to detect the security type, W/L SECURITY with the default security type WPA-PSK displays. If a different security type is required, press any select key or area and WEP WPA NONE displays. Press the select key or area of the desired security type to choose.

6. Enter the W/L KEY and the panel will perform a connection test and CONNECTING will display. When successful, CONNECTED will display on the keypad. If the panel does not connect to the Wi-Fi network, NOT CONNECTED will display. Press CMD to return to the WIFI SETUP main screen. See Entering Non-Alpha Characters in the Introduction or Entering User Names in Appendix C.

#### Manual

1. Access the User Menu.
2. Press CMD until WIFI SETUP? displays.
3. Press any select key or area. The keypad displays WPS LIST MANUAL.
4. Select MANUAL and the Wi-Fi network currently programmed in the panel is displayed. If there is no Wi-Fi network currently programmed in the panel, enter the name of the Wi-Fi network and press CMD to connect. The default is SecureCom. See Entering Non-Alpha Characters in the Introduction or Entering User Names in Appendix C.

**Note:** When an SSID (Wi-Fi Network name) is entered for the first

time or changed, the panel searches for the SSID entered to ensure communication. When the panel connects to the SSID entered, SSID FOUND displays. If the panel cannot connect to the SSID entered, SSID NOT FOUND displays.

5. When connecting to the Wi-Fi network the panel will also detect the security type in use and W/L KEY: \*\*\*\*\* displays.

**Note:** If the panel is unable to detect the security type, W/L SECURITY with the default security type WPA-PSK displays. If a different security type is required, press any select key or area and WEP WPA NONE displays. Press the select key or area of the desired security type to choose.

6. Enter the W/L KEY and the panel will perform a connection test and CONNECTING will display. When successful, CONNECTED will display on the keypad. If the panel does not connect to the Wi-Fi network, NOT CONNECTED will display. Press CMD to return to the WIFI SETUP main screen.

#### Test

1. Access the User Menu.
2. Press CMD until WIFI SETUP? displays.
3. Press any select key or area. The keypad displays WPS LIST MANUAL. Press CMD again to display TEST.
4. Select TEST and the SSID (Wi-Fi Network name) you are attempting to connect to displays on the top line of the keypad and CONNECTING displays on the bottom line. The panel will attempt to connect to the Wi-Fi network currently programmed in the panel. When the TEST successfully connects to the Wi-Fi network, CONNECTED displays on the keypad. If the TEST is unsuccessful, NOT CONNECTED will display. Press CMD to return to the WIFI SETUP main screen.

#### Bypass Zones

**User Code Level:** Master or Standard.

**Function:** Allows you to bypass a zone prior to arming the system. Bypassing is usually done when a zone cannot be restored to normal

and you want to arm the system. Once bypassed, the system does not respond to any activity on the zone.

A zone can be bypassed only while it is disarmed. Since Fire, Panic, Emergency, and Supervisory zones are always armed, they can never be bypassed.

The Bypass Zones function can also be used to restore a bypassed zone back into the system. This can only be done while the zone is disarmed. Disarming always resets a bypassed zone.

Your system may be pre-programmed at installation to send a bypass report to your central station when Bypass Zones is selected.

### **Using the Bypass Zones Function**

1. Access the User Menu.
2. Press the CMD key until **BYPASS ZONES?** displays.
3. Press any select key or area. The keypad displays **ZONE - RST BYPS.**
4. To reset a zone, enter the zone number and Select **RST.**
5. To Bypass a zone, enter the zone number and Select **BYPS.**

## **Zone Monitor (Chime)**

**User Code Level:** Master or Standard.

**Function:** Allows the system to monitor selected disarmed zones (doors, windows, or motion detectors). When a monitored zone trips, the keypad sounds a chime tone and displays the zone name. This is an ideal feature for monitoring door zones to tell when someone comes in or goes out and for system testing.

You can place any combination of disarmed zones in Zone Monitor but only the most recently tripped zone displays. The displayed zone name clears automatically after a short time or when the zone is armed. Zone Monitor does not function while the system is armed but a zone placed into the Zone Monitor is still monitored when the system is disarmed.

**Using Zone Monitor as part of your weekly system test:** After using the System Test function, place all zones in Zone Monitor. Starting at the front door, walk around and open and then close each door and window. You should hear the keypad beep each time. The keypad also displays the name of each zone as its device is opened.

Once all protected doors and windows are tested, walk in front of each motion detector and trip any other protection devices on the system. The keypad should beep to confirm their operation. If at any time during your weekly testing a device does not cause the keypad to beep, call the service department for assistance.

### **Monitor (Chime) Shortcut Key**

**All Systems** — Press 5 for 2 seconds when the system is disarmed. This initiates the Zone Monitor operation for all Exit zones in an Area system or all zones assigned to the perimeter in a Home/Sleep/Away or All/Perimeter system. The keypad displays **MONITOR ON** and chimes or displays **MONITOR OFF** and no tone is sounded.

## Using the Zone Monitor Function

1. Access the User Menu.
2. Press the CMD key until ZONE MONITOR? displays.
3. Press any select key or area.  
The keypad displays PERIM ALL NBR.
4. Select PERIM to place all disarmed perimeter zones into Zone Monitor.
  - 4a. The keypad displays PERIM? ADD RMV.
  - 4b. Select ADD to add all perimeter zones to Zone Monitor.
  - 4c. Select RMV to remove all perimeter zones.
5. Select ALL to place all disarmed zones into Zone Monitor.
  - 5a. The keypad displays ALL? ADD RMV.
  - 5b. Select ADD to add all disarmed zones to Zone Monitor.
  - 5c. Select RMV to remove all disarmed zones.
6. Select NBR to enter a specific zone number for zone monitor.
7. If NBR is selected, the keypad displays ZONE : - ADD RMV.
  - 7a. Enter any zone number and select ADD to add this zone.
  - 7b. Enter any zone number and select RMV to remove the zone.
8. The zone number automatically disappears and a new zone number can then be entered. See step 7.

## System Test

**User Code Level:** Master or Standard.

**Function:** System Test is used to test the battery, alarm siren, and central station communication. The System Test function begins automatically as soon as you select it.

### Using the System Test Function

1. Access the User Menu.
2. Press the CMD key until SYSTEM TEST? displays.
3. Press any select key or area. The system test begins automatically and the keypad displays:
  - 1) SIREN SOUNDING during a two second siren test, then:
  - 2) KEYPAD SOUNDING during a two second keypad test, then:
  - 3) BATTERY - OKAY or BATTERY - TRBL to indicate the battery condition, then:
  - 4) TRANSMIT TEST \* and ATTEMPT NO : 1 during the transmit test, then:
  - 5) TRANSMIT OKAY or TRANSMIT FAILED to show the transmit test results, then:
  - 6) TEST END to indicate the System Test is complete.
  - 7) Press the Back Arrow key to end the system test.

\* The transmit test does not occur on local systems.

**Testing your system burglary protection:** The System Test function should be part of your weekly testing and should be followed by placing the interior and perimeter burglary devices in Zone Monitor mode. This allows you to open and then close each protected door and window while listening for the keypad to beep confirming its operation. See Zone Monitor.

## User Codes

**User Code Level:** Master only.

**Function:** Allows you to add or delete a user from the system or change their user code or authority level.

**User code characteristics:** There are three characteristics associated with each user code that define its capabilities within the system.

| Characteristic  | Example    |
|-----------------|------------|
| User Number     | 22         |
| User Code       | 3848       |
| User Name       | John Smith |
| Authority Level | Master     |

**User Number** - The XTLplus Series panel supports 99 users. Each user is numbered from 1 to 99. This number identifies them to the system and can be transmitted to the central station (if your system is monitored) when they arm or disarm the system.

**User Code** - Users also have a 4-digit user code they enter into the keypad when arming or disarming. This user code is kept secret from other users and is not transmitted to the central station when they arm or disarm.

**Note:** A User Code cannot begin with zero and cannot be left blank.

**User Names** - Each code may also be programmed with the user name. You may enter up to 16 characters for the name. As needed, refer to Entering Non-Alpha Characters in the Introduction or Entering User Names in Appendix C for more information.

**Authority Level** - The user is also assigned a level of authority (Master or Standard) by the person administrating the system to determine the functions the user can access.

The table below lists system functions users are allowed to access based on the authority level assigned to their codes at the time they are added to the system.

| User Menu Option    | Standard | Master |
|---------------------|----------|--------|
| Door Access         | Y        | Y      |
| Arm and Disarm      | Y        | Y      |
| Alarm Silence       | Y        | Y      |
| User Checkin        | Y        | Y      |
| Zone Activity Check | Y        | Y      |
| Sensor Reset        | Y        | Y      |
| Outputs On/Off      | Y        | Y      |
| Favorites           | Y        | Y      |
| Z-Wave Setup        |          | Y      |
| WiFi Setup          |          | Y      |
| Bypass Zones        | Y        | Y      |
| Zone Monitor        | Y        | Y      |
| System Test         | Y        | Y      |
| User Codes          |          | Y      |
| Schedules           |          | Y      |
| Extend              | Y        | Y      |
| Set Time            |          | Y      |
| Display Events      | Y        | Y      |
| Service Request?    |          | Y      |

### Adding User Codes

**User Code Level:** Master only.

1. Access the User Menu.
2. Press the CMD key until USER CODES? displays.
3. Press any select key or area. The keypad displays ADD DEL CHG SEND.
4. Select ADD to add a new user code.
5. At the USER NUMBER: – prompt, enter a user number and press CMD.
6. The displays changes to CODE NO: . Enter the four-digit user

code and press CMD. This is the number the user enters each time they arm, disarm, or make changes to the system. If the code you entered is already in use, or is a code used internally by the system, the keypad displays ALREADY IN USE. You must enter a different 4-digit user code.

7. A 16-character name may be entered to identify the user. Press any top row key to clear the current text “user name”. You may then enter the new name. After entering the name press CMD. See Entering Non-Alpha Characters in the Introduction or Entering User Names in Appendix C.
8. The display changes to MASTER? NO YES.
9. Select YES to make the user code a Master user. Select NO to make the user code a Standard user. The following user code options can then be selected:
  - 9a. TEMP CODE NO YES.

Select NO to make this a permanent user code.  
Select YES to make this a temporary code. The keypad displays TEMP DAYS: - . Enter the number of days (1 to 250) that the temporary use code can operate. Default is seven days. Temporary users are deleted from the system at 12:00 AM on the last day. You can delete a Temporary user code at any time before the programmed period ends.

- 9b. AREAS: (Displays in Area systems only).  
Enter the area numbers where this user is to have access. For example: if you want this user to only have access to areas 1 and 2, enter the numbers 1 and 2.  
Once the correct area numbers display, press CMD.

- 9c. ARM ONLY NO YES.  
Select NO to allow this user to arm and disarm the system and access all Standard level functions in the User Menu. Select YES to restrict this user to arming only. The Arm Only user code can bypass zones not in a normal condition at the time of arming.

10. At the **USER CODE IN LOCK? NO** display, choose whether or not the user code is stored in all compatible Z-Wave Doors. Press the third top row select key or area for **NO** or the fourth top row select key or area for **YES**. Then, press CMD.

**Note:** This option is only available for user codes 2-20. Once the user code has been received by the lock, entering it at the lock will lock the door or unlock the door and disarm the system depending on the user’s privileges.

11. After you complete your selections, the keypad displays **USER # ADDED**.
12. Press the Back Arrow key once to add another user or twice to exit the User Menu.

## Changing User Codes

**User Code Level:** Master only.

1. Access the User Menu.
2. Press the CMD key until **USER CODES?** displays.
3. Press any select key or area.  
The keypad displays **ADD DEL CHG SEND**.
4. Select **CHG** to change a user code.
5. At the **USER NUMBER:** – prompt, enter the user number to change and press CMD.
6. The display changes to **CODE NO: \* \* \* \***. Enter the new user code.

If the code you entered is already in use, or is a code used internally by the system, the keypad displays **ALREADY IN USE**. You must enter a different 4-digit user code.

7. The display then shows the current user name. Press any top row key to clear. See Entering User Names in Appendix C to enter a new name.
8. If you are changing a code other than your own, the keypad next displays **MASTER? NO YES**

Refer to steps 9 and 10 in the Adding User Codes section

on the previous page for additional options that can be selected for user codes with non-Master authority levels.

**Note:** Changing a user code does not change the user number. User number 2 may have their user code changed from 1234 to 5678 but they are still user number 2.

### Deleting User Codes

**User Code Level:** Master only.

1. Access the User Menu.
2. Press the CMD key until USER CODES? displays.
3. Press any select key or area. The keypad displays ADD DEL CHG SEND.
4. Select DEL to delete a user code from the system.
5. At the USER NUMBER: – prompt, enter the user number you want to delete and press CMD. The display changes to USER # DELETED.
6. The display then changes back to USER NUMBER: – for you to delete another user. Press the Back Arrow key twice to exit the User Menu.

## Schedules

**User Code Level:** Master only.

**Function:** The Schedules function allows you to program the times at which you normally turn your burglary protection on and off each day of the week. This information can then be used by the system to automatically arm or disarm the burglary protection.

You can also use the Closing Check/Extend feature with Schedules to ensure your system is armed by an authorized user at a specific time. This option sounds the keypad buzzer and displays **CLOSING TIME!** when a schedule expires. Users still on the premises are required to arm the system or extend the schedule. If the system is not armed, or the schedule not extended, a report can be sent to the central station and/or a cell phone.

When a schedule expires and **CLOSING TIME!** displays, the keypad next displays **ENTER CODE: -**. To silence the keypad buzzer and extend the schedule for one hour, a user must either enter a valid user code or present a card to the card reader.

Also, when a closing schedule expires, your system may turn on the Late to Close Output. This output turns off anytime your system is armed, or a schedule is extended or changed. See System Setup for Output information.

Your system provides you with three different types of schedules:

**Permanent** schedules are used for automatic arming and disarming and always occur at the same time until you change or delete them.

**Extend** schedules allow an authorized user to extend the present day's permanent scheduled closing time.

**Favorite** schedules allow a user to set up schedules for their existing Z-Wave favorites.

**Note:** This option is only available for XTL+Z and XTL+WZ panels.

**Sunrise/Sunset** schedules use local weather information to stay

synced with sunrise and sunset times throughout the year. You can set the schedule to activate or deactivate 5, 10, 15, 30, 45, or 60 minutes before or after sunrise or sunset. Only one Sunrise and one Sunset time can be saved per schedule.

**Note:** A weather zip code must be entered in SYSTEM OPTIONS for this option to be available.

## Permanent Schedules

**User Code Level:** Master only.

1. Access the User Menu.
2. Press the CMD key until SCHEDULES? displays. Press any select key or area. The keypad displays PRM EXT. Select PRM.
3. The keypad next displays the day of the week you want the schedule to start as SUN MON TUE WED. Press the CMD key to show the remaining days of the week and then Select the start day.
4. The keypad displays OPENING TIME?. Press CMD. The keypad now displays MON - : AM PM. Enter the time you want the burglary protection to be turned off. Use a 12 hour clock only (12:00 to 11:59). Select AM or PM.
5. The keypad then displays CLOSING TIME?. Press the CMD key. The keypad then displays MON - : AM PM. If you want the schedule to be for consecutive days, Select MON to increment the days of the week. When the correct day is shown, enter the time you want the burglary protection to turn on.
6. To clear a schedule, press DELETE and then AM when the opening time is requested. Press the Back Arrow key to exit the User Menu.

## Extending Schedules

**User Code Level:** Master or Standard.

**Function:** This option allows users to extend today's programmed closing time schedule.

## Extending a Closing Schedule

1. Access the User Menu.
2. Press the CMD key until SCHEDULES? displays. Press any select key or area.
3. The keypad displays PRM EXT FAV. Select EXT. The keypad displays - : AM PM. Enter in the new time for the closing schedule to expire.

## Favorite Schedules

**User Code Level:** Master or Standard.

**Note:** This option is only available for XTL+Z and XTL+WZ panels.

### Adding a Favorite Schedule

1. Access the User Menu.
2. Press the CMD key until SCHEDULES? displays. Press any select key or area.
3. The keypad displays PRM EXT FAV. Select FAV.
4. The screen displays FAVORITE :- . Enter the number of the favorite that you want to set up a schedule for and press the CMD key.
5. The screen displays SUN MON TUE WED. Press the CMD key to display THU FRI SAT. Press the day that you want to set up a schedule on.
6. The screen displays ACTIVATE TIME. Press any select key or area to set the time.
7. Use the keypad to enter the time, and then select either AM or PM.

### Adding a Sunrise/Sunset Favorite Schedule

**User Code Level:** Master only.

1. Access the User Menu.
2. Press the CMD key until SCHEDULES? displays. Press any select key or area.
3. The keypad displays PRM EXT OUT FAV. Select FAV.
4. Enter the favorite number and press CMD.
5. The screen displays SUN MON TUE WED. Press the CMD key

to display THU FRI SAT. Press the day that you want to set up a schedule on.

6. The keypad displays ACTIVATE AT. Press the second select key or area.
7. Select SUNRISE or SUNSET and then use the select keys or areas below the - and + to set an offset time. Choose from 5, 10, 15, 30, 45, or 60 minutes before or after sunrise or sunset.
8. Press CMD to save the schedule.

## Output Schedules

User Code Level: Master only.

### Setting Output (OUT) schedules

The Schedules function allows you to set up a schedule for each of the eight outputs connected to your system to turn ON and OFF automatically.

1. Access the User Menu.
2. Press CMD until SCHEDULES? displays. Press any select key or area.
3. The keypad displays PRM EXT OUT FAV. Select OUT.
4. At the OUTPUT NO: - display, enter the output number you want to program. Press the CMD key.
5. The keypad displays SUN MON TUE WED. Press the CMD key to display THU FRI SAT.
6. Select the day you want to program.

Note: After selecting the day of the week for the schedule to occur, the keypad displays any currently programmed ON OFF times previously set for that day. This feature allows you to review programmed schedules at any time.

7. If ON OFF times display, the keypad then displays DELETE KEEP. Select DELETE to enter new times.
8. The keypad then displays ON TIME?. This is followed by the display - : AM PM.

Enter a new output ON time and select AM or PM.

The display changes to OFF TIME?. This is followed by the display - : AM PM.

Enter a new OFF time for the output.

Enter all schedule times using a 12 hour clock. For example, to enter 6 AM you would enter a 0 + 6 + 0 + 0 and Select AM. For 11 PM you would enter a 1 + 1 + 0 + 0 and Select PM.



9. The keypad returns to the day of the week display allowing you to enter another Output schedule. To exit the user menu or to go back to the SCHEDULES? display, press the Back Arrow key.
10. To clear a schedule press DELETE and then AM when the opening time is requested.

### **Adding a Sunrise/Sunset Output Schedule**

User Code Level: Master only.

1. Access the User Menu.
2. Press the CMD key until SCHEDULES? displays. Press any select key or area.
3. Press CMD to display SUNRISE SUNSET.
4. The keypad displays PRM EXT OUT FAV. Select OUT.
5. At the OUTPUT NO: - display, enter the output number you want to program. Press the CMD key.
6. The screen displays SUN MON TUE WED. Press the CMD key to display THU FRI SAT. Select the day that you want to set up a schedule on.
7. The keypad displays TURN ON AT. Press the second select key or area.
8. Select SUNRISE or SUNSET and then use the select keys or areas below the - and + to set an offset time. Choose from 5, 10, 15, 30, 45, or 60 minutes before or after sunrise or sunset.
9. Press CMD.
10. The keypad displays TURN OFF AT. Press the second select key or area.
11. Select SUNRISE or SUNSET and then use the select keys or areas below the - and + to set an offset time. Choose from 5, 10, 15, 30, 45, or 60 minutes before or after sunrise or sunset.
12. Press CMD to save the schedule.

## **Time and Date**

**User Code Level:** Master only.

**Function:** Allows you to change the current date and time displayed on the keypad and used by the system for schedules and Display Events.

### **Setting the Time and Date**

1. Access the User Menu.
2. Press CMD until TIME? displays. Press any select key or area.
3. The keypad displays the current day and time. Press the CMD key to display the current date. Press the CMD key again to make any changes.
4. The keypad displays TIME DAY DATE. Select TIME to change the time. The keypad displays - : AM PM. Enter the current time and select AM or PM.
5. The display changes back to TIME DAY DATE.
6. Select DAY to change the day of the week. The keypad displays SUN MON TUE WED. If the current day does not display, press the CMD key. Select the correct day.
7. Select DATE to change the date, and press CMD to cycle through the different parts of the date. The keypad displays:  
 MONTH: - Enter up to two digits for the month.  
 DAY: - Enter up to two digits for the day.  
 YEAR: - Enter up to two digits for the year.  
 The display returns to TIME DAY DATE.  
 Press the back arrow key to exit the User Menu.

## Display Events

**User Code Level:** Master or Standard.

**Function:** Allows you to view up to 100 past events that occurred on your system from any keypad. Any event older than 45 days automatically clears from the system memory. Once the full 100 events are reached, any new event received clears the oldest event from the list.

Refer to Appendix A for detailed Display Events information.

## Request Service?

**User Code Level:** Master only.

**Function:** Allows you to send a Request for Service message to the central station when there is a problem on your system.

After the Display Events option in the keypad User Menu, the **REQUEST SERVICE?** option displays if a master code was used to enter the menu. This feature does not display if it is not enabled on your system.

If your system is monitored by a central station and you need to send a Request for Service report to the central station, press any select key or area while **REQUEST SERVICE?** displays. After the Request for Service report is sent, the keypad displays **REQUEST MADE** for four seconds.

If there is a problem with the telephone line connected to the system, you must contact our service department directly for assistance.

# System Setup

## System Setup Record

This System Setup section is provided to allow you to track the current status of programmable options on your XTLplus Series system. If you make changes to the system, you should update the information contained on these pages.

Your system is monitored by a central station.

Yes    No

C/S Name: \_\_\_\_\_

Address: \_\_\_\_\_

City/State: \_\_\_\_\_

Emergency Phone: \_\_\_\_\_

Service Phone: \_\_\_\_\_

Service Manager: \_\_\_\_\_

Your system sends Opening and Closing reports.

Yes    No

Your system sends Zone Bypass reports.

Yes    No

Your system sends Ambush reports.

Yes    No

## Protection Areas

Your system may be divided into six separate areas, each area can have a name or description that displays at the keypad. This can help you easily track events when they occur elsewhere in your system.

| Area # | What it Controls |
|--------|------------------|
| 1      | _____            |
| 2      | _____            |
| 3      | _____            |
| 4      | _____            |
| 5      | _____            |
| 6      | _____            |

## Output Record

Your system has outputs that can be used for various functions. The list below identifies the output numbers and device names.

| Output # | What it Controls |
|----------|------------------|
| _____    | _____            |
| _____    | _____            |
| _____    | _____            |
| _____    | _____            |
| _____    | _____            |
| _____    | _____            |

Use the Output number in the User Menu when using the Outputs On Off option to manually operate the relays.

## Z-Wave Device Name

1 \_\_\_\_\_  
2 \_\_\_\_\_  
3 \_\_\_\_\_  
4 \_\_\_\_\_  
5 \_\_\_\_\_  
6 \_\_\_\_\_  
7 \_\_\_\_\_  
8 \_\_\_\_\_  
9 \_\_\_\_\_  
10 \_\_\_\_\_  
11 \_\_\_\_\_  
12 \_\_\_\_\_  
13 \_\_\_\_\_  
14 \_\_\_\_\_  
15 \_\_\_\_\_  
16 \_\_\_\_\_  
17 \_\_\_\_\_  
18 \_\_\_\_\_  
19 \_\_\_\_\_  
20 \_\_\_\_\_  
40 \_\_\_\_\_

21 \_\_\_\_\_  
22 \_\_\_\_\_  
23 \_\_\_\_\_  
24 \_\_\_\_\_  
25 \_\_\_\_\_  
26 \_\_\_\_\_  
27 \_\_\_\_\_  
28 \_\_\_\_\_  
29 \_\_\_\_\_  
30 \_\_\_\_\_  
31 \_\_\_\_\_  
32 \_\_\_\_\_  
33 \_\_\_\_\_  
34 \_\_\_\_\_  
35 \_\_\_\_\_  
36 \_\_\_\_\_  
37 \_\_\_\_\_  
38 \_\_\_\_\_  
39 \_\_\_\_\_  
40 \_\_\_\_\_



## Key Fob Button Programming

Enter the user name assigned to each key fob and the button action programmed for each button in the table below. Refer to the Introduction and Appendix B for more information.

| Key Fob | User Name | Button | Programmed Action |
|---------|-----------|--------|-------------------|
|         |           | TOP    |                   |
|         |           | BTM    |                   |
|         |           | LFT    |                   |
|         |           | RGT    |                   |
|         |           | TOP    |                   |
|         |           | BTM    |                   |
|         |           | LFT    |                   |
|         |           | RGT    |                   |
|         |           | TOP    |                   |
|         |           | BTM    |                   |
|         |           | LFT    |                   |
|         |           | RGT    |                   |
|         |           | TOP    |                   |
|         |           | BTM    |                   |
|         |           | LFT    |                   |
|         |           | RGT    |                   |
|         |           | TOP    |                   |
|         |           | BTM    |                   |
|         |           | LFT    |                   |
|         |           | RGT    |                   |
|         |           | TOP    |                   |
|         |           | BTM    |                   |
|         |           | LFT    |                   |
|         |           | RGT    |                   |

## User Codes

The XTLplus Series system provides 30 user codes you can program for individual users. As you add new users or change current user codes, you can keep track of their name, user number, and other information here in this section. Use a pencil to allow for changes in the table on the next page.



# Appendix A

## About the Display Events Section

**User Code Level:** Master or Standard.

While in the Display Events function, use the CMD and Back Arrow keys to move forward or backward through the list of events. To view more information about each display, press the select key or area as directed in the explanations below.

### Using the Display Events Function

1. Access the User Menu.
2. Press the CMD key until DISPLAY EVENTS? displays. Press any select key or area.
3. The keypad displays FIRST LAST.

Select FIRST to view events starting from the oldest to the newest. If you select FIRST, use the CMD key to scroll up through the events displays.

Select LAST to view events starting from the newest to the oldest. If you select LAST, use the Back Arrow key to scroll down through the event displays.

Display Events allows you to view up to 100 past events that occurred on your system from any keypad. Any event older than 45 days automatically clears from the system memory. Once the full 100 events are reached, any new event received clears the oldest event from the list.

## Zone Activity Check Event Display

This displays the date and time the Zone Activity Check was enabled or disabled.

```
MSG 5:18P 10/17
ACT DISABLED
```

Activity Check Event Types - There are three event types:

**ACT DISABLED**      **ACT ENABLED**      **NO ZONE ACTIVITY**

### Description

The Zone Activity Check was disabled at 5:18 PM on October 17.

## Zone Bypass Event Displays

This displays the system zones bypassed.

```
BYP 5:18P 10/17
EAST WINDOW
```

Bypass Event Types - There are three event types:

**BYP** - Bypass      **RST** - Restore      **FRC** - Force Arm

**Note:** You may sometimes see the user as **SWG**. This is short for Swinger Bypass which is an automatic function that allows the system to bypass a zone.

### Description

The east window zone was bypassed. Press any select key or area for the zone number and user number.



## Zone Event Displays

This section displays alarms, troubles, and other events that could occur on your protection zones.

|               |        |       |
|---------------|--------|-------|
| ALR           | 10:23P | 10/17 |
| BASEMENT DOOR |        |       |

### Description

An alarm occurred at 10:23 PM on October 17. Press any select key or area to see the zone number and zone type.

Zone Type - There are seven possible zone types you may see here.

**FIRE** - Fire      **PANC** - Panic      **BURG** - Burglary

**EMRG** - Emergency      **SUPV** - Supervisory

**AUX1** - Auxiliary 1      **AUX2** - Auxiliary 2

Event Types - There are seven event types you may see here:

**ALR** - Alarm      **TBL** - Trouble      **RST** - Restore

**FLT** - Zone Fault      **SVC** - Service Smoke Detector

**LOW** - Low battery      **MIS** - Missing wireless transmitter

**Note:** LOW and MIS are for wireless systems only.

## Arming and Disarming Event Displays

This displays any system areas arming or disarming.

|           |       |       |
|-----------|-------|-------|
| ARM       | 5:10P | 10/17 |
| WAREHOUSE |       |       |

### Description

The warehouse area was armed at 5:10 PM. Press any select key or area to display the area number and user number.

Arming Event Types - There are two event types you may see here:

**ARM** - User armed the system      **DIS** - User disarmed the system

## User Check-in Event Displays

This shows when a user selected the Check-in feature from the User Menu. See page 16 for more information.

|         |        |       |
|---------|--------|-------|
| MSG     | 3: 31P | 10/17 |
| CHECKIN | USER:  | 16    |

### Description

User 16 selected the Check-in feature at 3:31 PM on Oct. 17.

## User Code Change Event Displays

This displays any user code additions, deletions, or changes.

|       |        |       |
|-------|--------|-------|
| ADD   | 11:41A | 10/17 |
| US:19 | BY     | US:12 |

### Description

At 11:41 AM user 12 added user 19.

User Code Event Types - There are three event types you may see here:

**ADD** - User added      **DEL** - User deleted

**CHG** - User code or authority level was changed.

## Supervisory Event Displays

This displays the automatic test report date and time.

|                                 |
|---------------------------------|
| MSG 11:58P 10/17<br>AUTO RECALL |
|---------------------------------|

### Description

The test report was sent to the central station at the date and time shown.

## System Monitor Event Displays

This displays any problems with the system AC power or battery.

|                              |
|------------------------------|
| TBL 11:41A 10/17<br>AC POWER |
|------------------------------|

### Description

An AC failure occurred at 11:41 AM on October 17.

System Monitor Event Types - There are two event types:

**TBL** - Trouble      **RST** - Restore

System Monitor Event Names - There are two system monitors:

**AC POWER**      **BATTERY**

## Wireless Jamming Event Displays

This displays wireless interference events that have occurred.

### Keypad Display

|                              |
|------------------------------|
| ALR 11:41A 10/17<br>WIRELESS |
|------------------------------|

### Description

The DMP wireless receiver detected interference on October 17 at 11:41 AM.

Wireless Jamming Event Types - There are three event types:

**TBL** - Trouble (an interference event occurred when the panel was disarmed)

**ALR** - Alarm (an interference event occurred when any area was armed)

**RST** - Restore

## Appendix B

### 1100 Series Wireless Description

If your system uses wireless devices and includes key fob(s), refer to the following information. The wireless section includes a brief discussion of key fob(s) and a drawing identifying the key fob buttons. Refer to the System Setup section of this guide to check the button programming list for key fob(s) connected to your system.

For best operation, allow the LED to turn on and then turn off before pressing another button. The key fob may not complete sending the signal for the button press if another button is pressed too soon.

### LED Status Operation

Depending on the programmed action of a key fob button, the Status LED lights to acknowledge a button press or to indicate the armed state of the system.

- When the button is programmed for Panic, Panic 2, Emergency, Emergency 2, Output, or Sensor Reset, a 1/2 second Green light displays to acknowledge the button press.
- When the button is programmed for Arm, Disarm, Toggle (Arm/Disarm), or Status, the system armed status is received by the key fob and the LED lights once as shown in the table to the right.

| LED Color | Duration    | Description                     |
|-----------|-------------|---------------------------------|
| Red       | 2.0 Seconds | All System On                   |
| Green     | 2.0 Seconds | All System Off                  |
| Green/Red | 2.0 Seconds | System On<br>(Some Areas Armed) |

When a button is pressed that is not programmed, the LED does not operate.

# Appendix C

## User's Guide

This section of the user's guide provides information on using the XTLplus Series card read capability if enabled for your system. The card reader is located under the keypad logo. The keypad displays for All/Perimeter or Home/Away operation are dependent on how your keypad was programmed by your alarm dealer.

There are two different operating modes: Arming and Disarming, and Entry Delay. All of the examples below assume that your system requires a user code to arm and disarm the protection.

### ARMING AND DISARMING AN ALL/PERIMETER SYSTEM

Press CMD. The keypad displays **PERIM ALL** (when arming) or **DISARM?**. Press the select key or area under the desired option. The keypad displays **ENTER CODE: -**.


Present your card to the keypad logo. Once the system validates the card, if you choose **PERIM**, only the perimeter arms. If you choose **ALL**, both areas arm. If programmed, **ALL** is automatically chosen for you after a short delay. All armed areas disarm automatically.



### ARMING AND DISARMING A HOME/AWAY SYSTEM

Present your card to the keypad logo. If the system is armed, once the system validates the card, all areas are disarmed and the keypad displays **ALL SYSTEM OFF**.

If the system is disarmed when you present your card, once the system validates the card, **HOME SLEEP AWAY** displays. You can manually press the select key or area under the desired option or after short time all areas automatically arm in the **AWAY** mode.

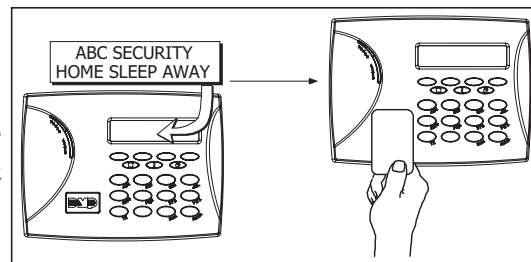


---

## ARMING AND DISARMING AN AREA SYSTEM

Press CMD, the keypad displays **ARM DISARM?**. Press the select key or area under either option.

The keypad displays **ENTER CODE: -**.

Present your card to the keypad logo. Once the system validates the card, all areas accessible by you arm or disarm automatically.

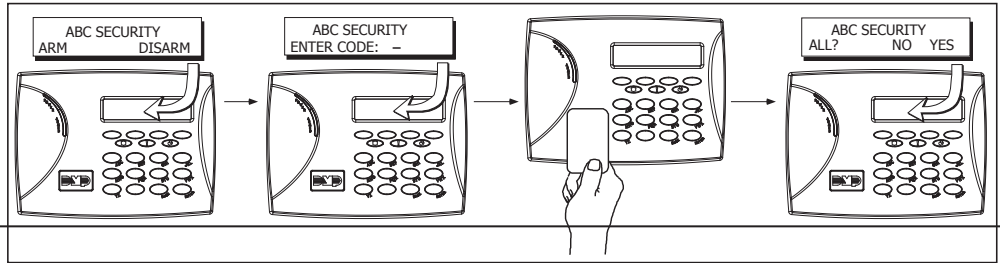


---

## ENTRY DELAY

**All Systems** - Once the protected door is opened and the entry delay starts, the keypad displays **ENTER CODE: -**. Present your card to the keypad logo and, once validated, the system disarms all areas. The top line of 32-character keypads displays the zone name. Area systems provide a delay to allow selected areas only to be disarmed. See Arming and Disarming above and on the previous page.

### Using the access reader for user menu access

You can also use a card read to access the User Menu when **MENU? NO YES** displays.

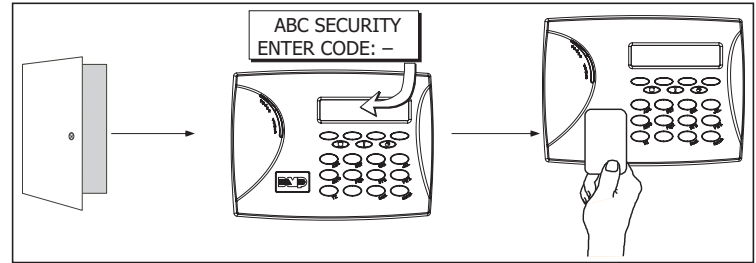

## Entering User Names

Refer to the following when entering names information into the keypad.

**1**  
To enter a custom name into the keypad, you use the three rows of number keys.

**2**  
Under each number key are three letters. To enter a custom name, press the number key above the letter you want to enter. For lower case letters press the number key followed by the select key for the desired letter twice.

**3**  
With the number displayed, press the SELECT key/area that matches the letter position. See example.

**4**  
Once the letter you want displays, press the number key above the next letter you want to enter.

You can enter up to 16 characters for each name into the keypad.

The nine and zero keys . . .

Pressing the 9 key provides you with Y, Z, and a space to use between names. Pressing the 9 key followed by the select key for the desired letter twice provides the lower case letters y, z, ;, or ;. For example: Bob Smith

Pressing the 0 (zero) key provides you with a - (dash), . (period), \* (asterisk), and a # (pound sign).

# Appendix D

## Cell Phone Message User's Guide

Your XTLplus Series security system's reporting capability can be used to send reports to a cell phone number. You can receive reports of alarms, troubles, or system armings and disarmings and know at a glance your system status.

The following are types of messages that can be sent:

- \* Zone Alarms by Zone Name
- \* Zone Bypass by User
- \* Disarming (Openings) by User
- \* Late to Open
- \* AC Power (and restoration)
- \* Ambush
- \* Alarm Verified by User
- \* In-Activity
- \* Zone Troubles by Zone Name
- \* Armings (Closings) by User
- \* Late to Close
- \* Early to Close
- \* System Low Battery
- \* Abort & Cancel by User
- \* Check-in by User

For alarm messages, the message provides the system name, zone name, zone number, message type, and the time at which the panel sent the message.

For alarm messages sent to a cell phone number, you have the option to reply with "cancel" to cancel the existing alarm.

### MyAccess™ Text Messaging Commands

Your system may be programmed to allow simple text messages to be sent to the security system and perform basic user operations. By texting a message from your cell phone, the following actions can be performed: Arm/Disarm, Cancel Alarm, turn Outputs On/Off, check Armed Status, Turn on and off lights, Lock and unlock doors, and Set the thermostat.

The user that is texting commands to the system must have the authority to perform the commands as if it occurred at the keypad. The cell phone number and user numbers are setup during programming.

After programming is completed, you will receive a welcome message text from the panel. Write down the phone number that the message comes from. This will be the number you use to text user operations to the system.

**Note:** When texting commands listed below, the commands can be either upper or lowercase.

A list of text commands can be obtained by texting "help" to the system phone number. Store this number in your cell phone and write the number on the Quick Reference Wallet Card located at the back of this manual.

### Arming All Areas with Text Message Commands

Text message your system panel with the following command:

- ARM, AWAY, or ALL: To arm all areas, depending on your system

### Arming Partial Areas with Text Commands

Text message your system panel with the following command:

- SLEEP: To arm the perimeter and interior of a Home/Sleep/Away system.
- HOME: To arm just the perimeter of a Home/Away/Sleep system.
- PERIM: To arm the perimeter of an All/Perimeter system.
- ARM "Area Number" or ARM "Area Name": To arm specific areas of an Area system.

The NAME should identify the area name. The NUMBER should identify the area number. Names and numbers can be mixed, and a comma should separate the areas. If ARM is sent without any other words, all areas are armed.

If the system is already armed, you can arm it again only if you are arming more areas than were originally armed.

### **Disarming All Areas with Text Message Commands**

Text message your system panel with the following command:

- **DISARM:** To disarm all areas.

### **Disarming Partial Areas with Text Message Commands**

Text message your area system panel with the following command:

- **DISARM “Area Number”** or **DISARM “Area Name”:** To disarm specific areas of an Area system.

The **NAME** should identify the area name. The **NUMBER** should identify the area number. Names and numbers can be mixed, and a comma should separate the areas. If **DISARM** is sent without any other words, all areas will be disarmed.

If the system is already disarmed, you will receive a message saying that the system is already disarmed.

### **Cancelling an Alarm with Text Messaging**

While the alarm siren sounds, you may choose to cancel the alarm via text messaging.

- If a valid alarm has not occurred, text **CANCEL** to disarm the system and cancel the alarm.

### **Turning Outputs On/Off/Momentary with Text Messaging**

Allows you to set the state of any output to on, off, or momentary.

1. To set the Output to **ON Steady**, text **ON** followed by the Output name or number. For example, to turn Output 3 on, you would text: **ON Lights** or **ON 3**.
2. To turn the Output to **OFF**, text **OFF** followed by the Output name or number. For example, to turn Output 3 off, you would text: **OFF 3** or **OFF LIGHTS**.
3. To turn the Output to **ON MOMENTARY** (the output turns on for one second, and then off), text **MOMENTARY** (or **MOM**) followed by the Output name or number. For example, to turn Output 3 to momentary, you would text: **MOMENTARY 3** or **MOM 3**.

### **Turning Lights On/Off with Text Messaging**

Allows you to turn Z-Wave compatible lights on or off.

1. To turn a specific light on, text **TURN ON** followed by the light name. For example, to turn Bedroom Light on, you would text: **TURN ON BEDROOM LIGHT**.
2. To turn a specific dimmer light on to a certain level, text **TURN ON** followed by the light name and the dimmer level (1-10). For example, to turn Front Dimmer Light on to level 8, you would text: **TURN ON FRONT DIMMER 8**.
3. To turn a specific light off, text **TURN OFF** followed by the light name. For example, to turn Bedroom Light off, you would text: **TURN OFF BEDROOM LIGHT**.



## **Locking/Unlocking Door Locks with Text Messaging**

Allows you to lock/unlock Z-Wave compatible door locks.

1. To lock a specific lock, text LOCK followed by the lock name. For example, to lock the Front Door, you would text: LOCK FRONT DOOR.
2. To unlock a specific lock, text UNLOCK followed by the lock name. For example, to unlock the Front Door, you would text: UNLOCK FRONT DOOR.

## **Setting Thermostat with Text Messaging**

Allows you to set Z-Wave compatible thermostats with specific temperatures.

1. To set the thermostat to Cool or Heat with a specific temperature, text SET followed by the thermostat name followed by HEAT or COOL followed by the temperature. For example, to turn Main Thermostat on to COOL and 65°, you would text: SET MAIN THERMOSTAT COOL 65.
2. To set the thermostat to Auto with specific heat and cool temperatures, text SET followed by the thermostat name followed by AUTO followed by the high temperature and the cool temperature. For example, to turn Main Thermostat on to AUTO with temperatures of 80° and 60°, you would text: SET MAIN THERMOSTAT AUTO 80 60.
3. To set the thermostat fan to Auto or On, text SET followed by the thermostat name followed by FAN followed by ON or AUTO. For example, to turn the Main Thermostat fan on, you would text: SET MAIN THERMOSTAT FAN ON.

## **Activating Favorites with Text Messaging**

Allows you to activate a Favorite of Z-Wave compatible devices.

- To activate a Favorite, text ACTIVATE followed by the Favorite name. For example, to activate the Favorite named House Lights, you would text: ACTIVATE HOUSE LIGHTS.

## **Check Armed Status Text Command**

Allows you to check the system armed status. If armed, the system will send a message stating the type of system you have followed by ON, such as ALL SYSTEM ON or HOME SYSTEM ON. If disarmed and no open zones, the system will send SYSTEM READY. If disarmed with open zones, it will send SYSTEM NOT READY followed by any open zones. A message of AC POWER TROUBLE will indicate when a power failure occurs. If in alarm or trouble, the system will send ALARM ON or TROUBLE ON followed by up to 3 zone names that are in alarm or trouble.

- To receive the Armed Status, text: STATUS.

## **Check Status of Lights, Locks, and Thermostats Text Command**

Allows you to check the status of Z-Wave compatible lights, locks, and thermostats. The status shows which devices are currently on and any devices that are not responding

1. To receive the Status of Z-Wave compatible lights, text: STATUS LIGHTS.
2. To receive the Status of Z-Wave compatible locks, text: STATUS LOCKS.
3. To receive the Status of Z-Wave compatible thermostats, text: STATUS THERMOSTATS

## Subscribe to Text Messages

Allows you to set which text messages you receive from the panel. When your system is programmed to allow text messages, you will automatically be subscribed to ALL as described below. To change your subscription status, follow the instructions below for desired messages.

1. Text the words SUBSCRIBE STATUS ALL to receive a text message for all arming and disarming occurrences in addition to any alarm.
2. Text the words SUBSCRIBE STATUS NONE to not receive a text message for arming and disarming occurrences, but still receive a text message for any alarm.
3. Text the words SUBSCRIBE STATUS OTHERS to receive a text message for all arming and disarming occurrences originating from other users, in addition to any alarm. This option will send a text message for all arming and disarming occurrences except for the ones you initiate at a keypad.
4. Text the word SUBSCRIBE to show the current subscription status and the available subscription options.

## Common Keypad Displays

Listed below are several keypad messages you may see on the display. Follow the instructions in the Possible Solutions column to correct the problem. In many cases, you need to call a service person to correct the problem. Displays not discussed here indicate your service representative should be called.

| Message                            | Tone at Keypad | Meaning  | Possible Solutions  |
|------------------------------------|----------------|--|---|
| INVALID CODE                       | No             | The user code you entered is not recognized by the system.   | Check the user code and try again.  |
| CLOSING TIME                       | Yes            | The schedule has expired but the system has not been armed.  | Users still on the premises are reminded to arm the system or extend the schedule to a later time.          |
| AC TROUBLE                         | Yes            | The system is not getting proper AC power.   | Contact your service person if other electrical devices in your home are working.                           |
| BATTERY TROUBLE                    | Yes            | The battery is either low or missing.  | Contact your service person.  |
| SYSTEM TROUBLE or SERVICE REQUIRED | Yes            | There is a problem with one or more components in the system.  | Contact your service person.  |
| SYSTEM BUSY                        | No             | The system is performing another task with a higher priority.  | Wait a few moments for the system to complete the task. Contact your service person if the problem remains. |
| TRANSMIT FAIL                      | Yes            | The panel has attempted to communicate with the central station and has not succeeded.   | Contact your service person if the problem remains.   |
| ZWAVE BUSY                         | No             | Only one keypad at a time can access Z-Wave Setup. If a user attempts to access the menu from a second keypad Z-WAVE BUSY will be displayed. | The user must exit Z-Wave Setup in one keypad before accessing it in a second keypad.                       |



# Index

## Symbols

2-Button Panic Keys 4, 8  
24-Hour Zone 9

## A

ALARM display 7  
Alarm Silence b, 6, 14, 16, 18  
All/Perimeter System 14  
    Alarm Silence 14, 16  
    Arming 14  
    Disarming 16, 18  
    Shortcut Keys 15, 19  
Area System  
    Arming 12  
    Disarming 13  
    Schedules 34  
Arming 11  
    All/Perimeter 14, 48, 49  
    Area 12  
    Home/Away 16, 48  
    Instant 15  
    Key Fob 12  
    Shortcut Keys 15, 17, 19  
Arming/Disarming Event Display 45

## B

Back Arrow (<—) Key 5  
Backlighting 5  
Brightness 6  
Bypassing zones 11, 17, 23

## C

Cancel Alarm 14, 16, 18, 52  
Central Station Monitoring 9  
Changing User codes 33  
Check-in Report to Pager 19, 21  
COMMAND 22, 23, 24, 25, 26, 27, 28, 29, 36

*Index*

COMMAND (CMD) Key 5  
Common Keypad Displays 51  
CONNECTED 28, 29

## D

Data Entry Keys 5  
Disarming 13  
    All/Perimeter 15, 48  
    Area 13  
    Home/Away 18, 48  
    Key Fob 12  
Display Events 44  
    Arming and Disarming 45  
    Supervisory 46  
    System Monitor 46  
    User Events 45, 46  
    Wireless Events 46  
    Zone Events 44, 45

## E

Easy Entry™ User's Guide 48  
Easy Exit™ Shortcut Key 19  
Emergency Evacuation Plans 2  
ENTER CODE display 8  
Entering User Names 50  
Entry Delay 49  
Entry or Exit Zone 9  
Event Displays 44  
    Arming and Disarming 45  
    Supervisory 46  
    System Monitor 46  
    User Check-In 45  
    User Code Change 45  
    Wireless Jamming 46  
    Zone Activity check 44  
    Zone Bypass 44

Zone Events 45  
Exit Error 10  
Extending Schedules 35

## F

False Alarms 1  
Favorite 22, 23, 25, 26, 27

## H

Home/Away System 16  
    Arming 17  
    Disarming 17  
    Easy Exit™ Shortcut Key 18  
    Shortcut Keys 17, 19  
Home/Sleep/Away System  
    Alarm Silence 18  
How Your System Operates 11

## I

Instant Zone 9

## K

Key Fob  
    Button Layout 7  
    User Record 41  
Keypad  
    2-Button Panic Keys 4, 8  
    Alarm 7  
    Backlighting 5  
    Displays 55  
    Key Definitions 5  
    Select Keys 3  
    Shortcut Keys 18  
SYSTEM TROUBLE 8  
Tones 6  
Types 3  
User Menu 1

- User Options 5
- Volume 6
- Wireless Displays 7
- Key Fob 6, 42, 47
  - Arming 12
  - Button Programming 42
  - Disarming 12
  - LED Operation 47
  - Status Table 47
  - User Record 40

**L**

- LED Operation 4, 47

**M**

- MANUAL 28, 29

**N**

- NOT CONNECTED 29

**O**

- Options 6
- Outputs On Off 22

**P**

- Pager Direct™ 51
- Permanent Schedules 35
- PhoneAccess™ 59
- Power LED 4, 8

**R**

- Resetting the Sensors 19, 22

**S**

- Schedules
  - Extending 35
  - Permanent 35
- Security Command™ Keypad 1
- Displays 7

- Tones 6
- Security System Terms 8
- Select Keys 3
- Sensor Reset 22
- Setting the Date and Time 37
- Shortcut Keys 15, 17, 21, 22, 30
  - Arming Function 15, 17, 19
  - Check-in (Latch Key) Report Function 19, 21
  - Easy Exit™ Function 19
  - Monitor (Chime) Function 19, 30
  - Sensor (Fire) Reset Function 19, 22
- Silencing an Alarm b, 6
- SSID NAME 29
- Status List 9
- Supervisory Event Display 46
- System Monitor Event Display 46
- System Ready/System Not Ready 15, 16
- System Setup Record 39
- System Test 31

**T**

- TEST 28, 29
- Test Your System Weekly 1
- Thinline™ Keypad 4
- Tone 6
- TROUBLE display 8
- Trouble Tone Response b, 6

**U**

- User Check-In Event Display 45
- User Codes 32
  - Authority Levels 32
  - Change Event Display 45
  - Changing 33
  - Deleting 33
  - Names 32, 50

- Table 43
- User Menu Options 20, 32
- Zone Status 28

**V**

- Verify Alarm 14, 16, 18
- Volume 6

**W**

- Wi-Fi 20, 28, 29
- WIFI SETUP? 28, 29
- Wireless 6, 47
- W/L KEY 29
- WPS 28, 29

**Z**

- Zone 8
- Zone Activity Check 21
- Zone Event Display 45
- Z-Wave 22, 23, 24, 25, 26, 27, 28, 34
- Z-Wave devices 20, 22, 23, 24, 25, 26, 27, 28
- Z-Wave Favorite 22
- Z-Wave Setup 23, 55

# Quick Reference Wallet Cards

## Text Messaging Quick Commands

Panel Phone Number: \_\_\_\_\_

| Text           | For this action  |
|----------------|--|
| HELP           | List of text commands  |
| ARM, AWAY, ALL | Arm all areas of your system                                   |
| SLEEP          | Arm Perimeter and interior of a Home/Sleep/Away System         |
| HOME           | Arm perimeter of a Home/Sleep/Away System                      |
| PERIM          | Arm perimeter of an All/Perimeter System                       |
| ARM NAME, #    | Arm specific areas (enter area NAME or #) of an Area System    |
| DISARM         | Disarm all areas of your system                                |
| DISARM NAME, # | Disarm specific areas (enter area NAME or #) of an Area System |

Area Names:

1. \_\_\_\_\_ 4. \_\_\_\_\_
2. \_\_\_\_\_ 5. \_\_\_\_\_
3. \_\_\_\_\_ 6. \_\_\_\_\_

## MyAccess™ Text Messaging Quick Commands

Panel Phone Number: \_\_\_\_\_

| Text                   | For this action  |
|------------------------|--|
| HELP                   | List of text commands  |
| ARM, AWAY, ALL         | Arm all areas of your system                                   |
| SLEEP                  | Arm Perimeter and interior of a Home/Sleep/Away System         |
| HOME                   | Arm perimeter of a Home/Sleep/Away System                      |
| PERIM                  | Arm perimeter of an All/Perimeter System                       |
| ARM NAME, #            | Arm specific areas (enter area NAME or #) of an Area System    |
| DISARM                 | Disarm all areas of your system                                |
| DISARM NAME, #         | Disarm specific areas (enter area NAME or #) of an Area System |
| Status                 | To receive a status update                                     |
| Cancel                 | Cancel alarm while the alarm bell or siren sounds              |
| ON (Output name or #)  | Turns the Output specified to ON Steady                        |
| OFF (Output name or #) | Turns the Output specified to OFF                              |

Cut along dotted lines.

# Quick Reference Wallet Cards

## MyAccess™ Text Messaging Quick Commands

Panel Phone Number: \_\_\_\_\_

| Text                   | For this action  |
|------------------------|--|
| HELP                   | List of text commands  |
| ARM, AWAY, ALL         | Arm all areas of your system                                   |
| SLEEP                  | Arm Perimeter and interior of a Home/Sleep/Away System         |
| HOME                   | Arm perimeter of a Home/Sleep/Away System                      |
| PERIM                  | Arm perimeter of an All/Perimeter System                       |
| ARM NAME, #            | Arm specific areas (enter area NAME or #) of an Area System    |
| DISARM                 | Disarm all areas of your system                                |
| DISARM NAME, #         | Disarm specific areas (enter area NAME or #) of an Area System |
| STATUS                 | To receive a status update                                     |
| CANCEL                 | Cancel alarm while the alarm bell or siren sounds              |
| ON (Output name or #)  | Turns the Output specified to ON Steady                        |
| OFF (Output name or #) | Turns the Output specified to OFF                              |

Area Names:

1. \_\_\_\_\_ 2. \_\_\_\_\_
3. \_\_\_\_\_ 4. \_\_\_\_\_
5. \_\_\_\_\_ 6. \_\_\_\_\_

Output Names:

1. \_\_\_\_\_ 2. \_\_\_\_\_
3. \_\_\_\_\_ 4. \_\_\_\_\_
31. \_\_\_\_\_ 32. \_\_\_\_\_
33. \_\_\_\_\_ 34. \_\_\_\_\_
41. \_\_\_\_\_ 42. \_\_\_\_\_
43. \_\_\_\_\_ 44. \_\_\_\_\_

Cut along dotted lines.

| Text                                 | For this action                                  |
|--------------------------------------|--|
| OFF (Output name or #)               | Turns the Output specified to OFF                |
| MOMENTARY (Output name or #)         | Turns the Output specified to MOMENTARY          |
| Z-WAVE HELP                          | List of Z-Wave compatible text commands          |
| STATUS LIGHTS                        | To receive a status update for all light devices |
| TURN ON (Light name)                 | Turns the specified light to ON                  |
| TURN ON (Light name) (Dimmer level)  | Turns dimmer light on to a specific temp         |
| TURN OFF (Light name)                | Turns the specified light to OFF                 |
| STATUS LOCKS                         | To receive a status update for all lock devices  |
| LOCK (Lock name)                     | Locks the specified door lock                    |
| UNLOCK (Lock name)                   | Unlocks the specified door lock                  |
| STATUS THERMOSTAT                    | To receive a status update for the thermostat    |
| SET (thermometer name) COOL (Temp)   | Set thermostat to Cool with specific temp        |
| SET (thermometer name) HEAT (Temp)   | Set thermostat to Heat with specific temp        |
| SET (therm name) AUTO (Hi & Lo Temp) | Set thermostat to Auto with specific temps       |
| ACTIVATE (Favorite name)             | Activate the devices in the Favorite             |

Z-Wave Device Names:

| Device # | Z-Wave Device Name |
|----------|--------------------|
|          |                    |
|          |                    |
|          |                    |
|          |                    |
|          |                    |
|          |                    |
|          |                    |
|          |                    |
|          |                    |
|          |                    |

Cut along dotted lines.

1. Call the panel phone number. The panel answers and sounds one short tone.
2. Enter your code within eight seconds. One beep means the code is good. Four short beeps means enter it again. You have three tries.
3. You have 30 seconds to enter the first command (see other side) and 30 seconds for each additional command.

| If                          | You will hear |
|-----------------------------|---------------|
| All areas are armed         | 3 short beeps |
| Area 1 (Perimeter) is armed | 1 short beep  |
| Any area is armed           | 2 short beeps |
| All areas are disarmed      | 1 long beep   |

| Text                                 | For this action                                  |
|--------------------------------------|--|
| OFF (Output name or #)               | Turns the Output specified to OFF                |
| MOMENTARY (Output name or #)         | Turns the Output specified to MOMENTARY          |
| Z-WAVE HELP                          | List of Z-Wave compatible text commands          |
| STATUS LIGHTS                        | To receive a status update for all light devices |
| TURN ON (Light name)                 | Turns the specified light to ON                  |
| TURN ON (Light name) (Dimmer level)  | Turns dimmer light on to a specific temp         |
| TURN OFF (Light name)                | Turns the specified light to OFF                 |
| STATUS LOCKS                         | To receive a status update for all lock devices  |
| LOCK (Lock name)                     | Locks the specified door lock                    |
| UNLOCK (Lock name)                   | Unlocks the specified door lock                  |
| STATUS THERMOSTAT                    | To receive a status update for the thermostat    |
| SET (thermometer name) COOL (Temp)   | Set thermostat to Cool with specific temp        |
| SET (thermometer name) HEAT (Temp)   | Set thermostat to Heat with specific temp        |
| SET (therm name) AUTO (Hi & Lo Temp) | Set thermostat to Auto with specific temps       |
| ACTIVATE (Favorite name)             | Activate the devices in the Favorite             |


Cut along dotted lines.









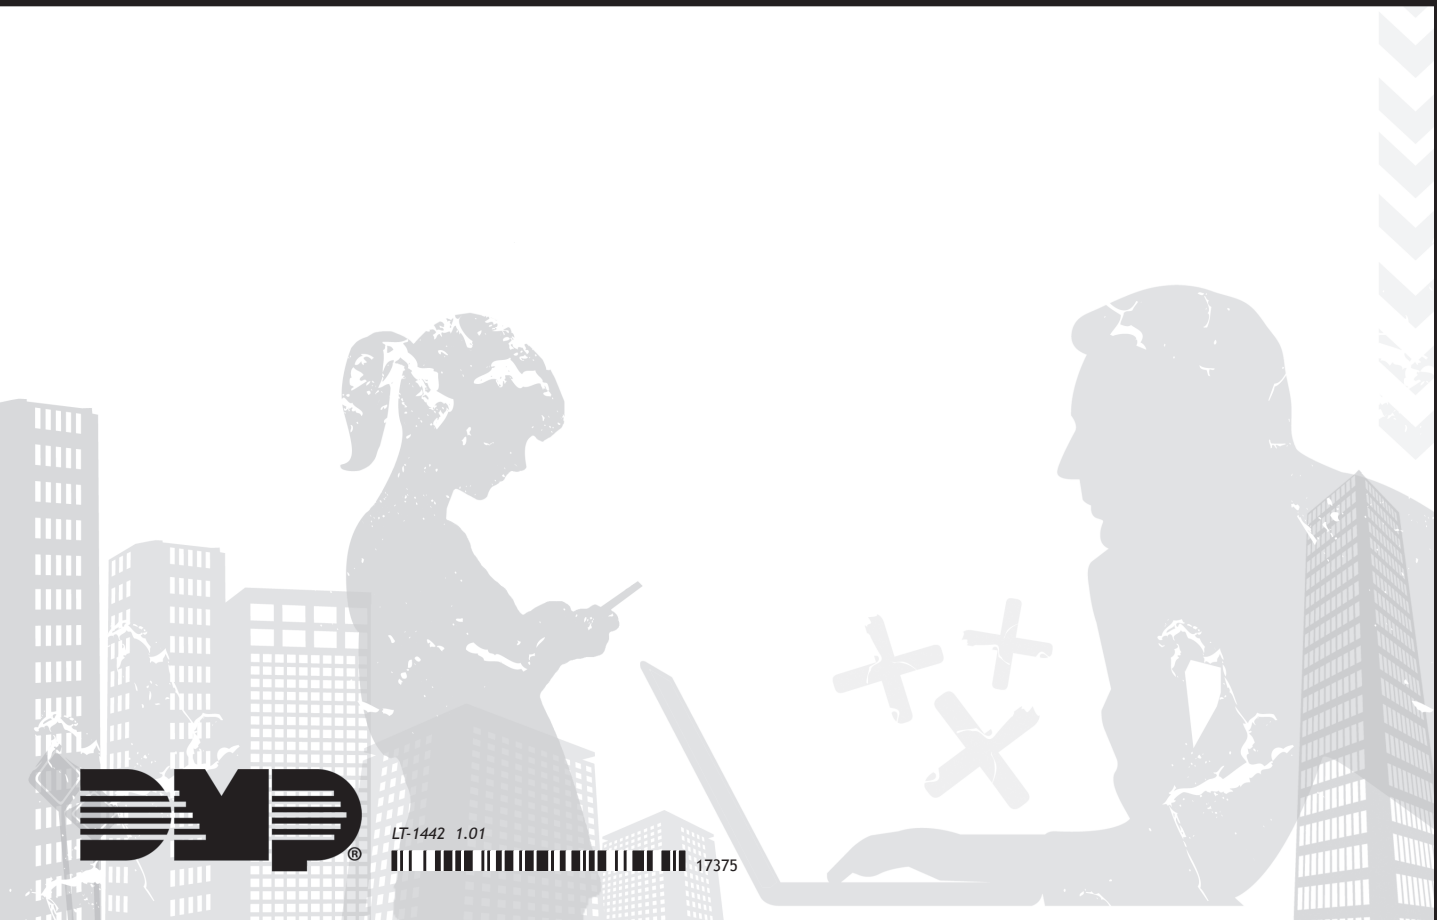

LT-1442 1.01



17375